



BROMIC[®]
HEATING

PLATINUM
SMART-HEAT™ GAS





The Platinum Smart-Heat™ Gas heater series spreads heat and comfort evenly in all areas, with a soft and soothing red glow. Built with pure premium materials and designed with elegance, there is no compromise on performance, reliability and beauty.

SEAMLESS INTEGRATION OF
MODERN CLEAN LINES, MINIMALISTIC
DESIGN AND QUALITY MATERIALS
ACHIEVES INNOVATIVE STYLING AND
TECHNICAL PERFORMANCE.

BRÖMIC

PLATINUM SMART-HEAT™ ELECTRIC
WITH OPTIONAL RECESS KIT


PLATINUM
SMART-HEAT™ ELECTRIC

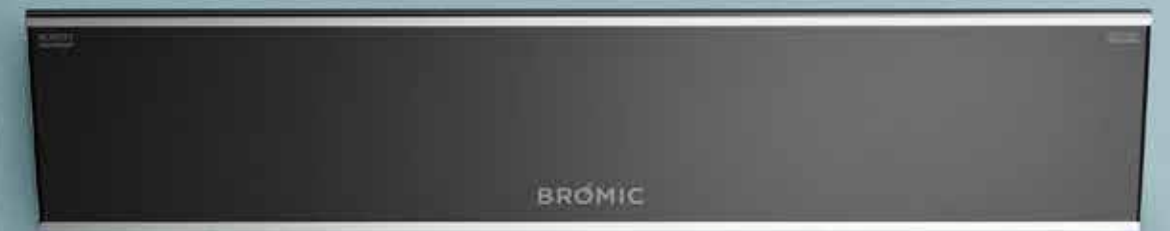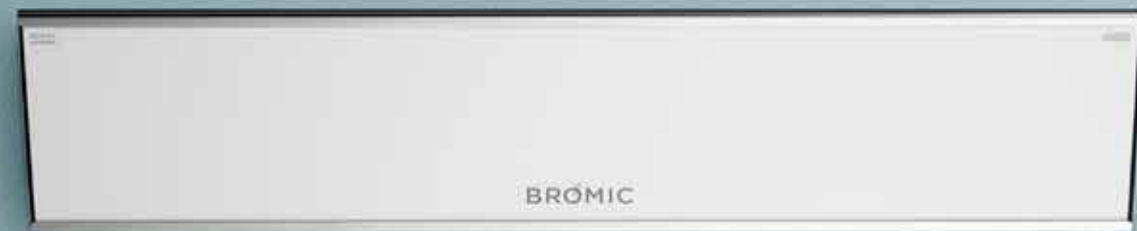


Available in black and white, our Platinum Smart-Heat™ Electric heater is specifically suited for low-clearance and design-focused spaces in mind. This slim-line, stainless steel unit spreads comfort evenly in its space, all while minimizing light emission and blending seamlessly into the background with our recess mounting solutions.



OUR DEDICATION TO INNOVATION IN
QUALITY AND DESIGN, ALLOWS US TO
SOLVE A WIDE ARRAY OF REAL-WORLD
CHALLENGES SUCH AS CLIMATE,
EFFICIENCY AND ENVIRONMENT.

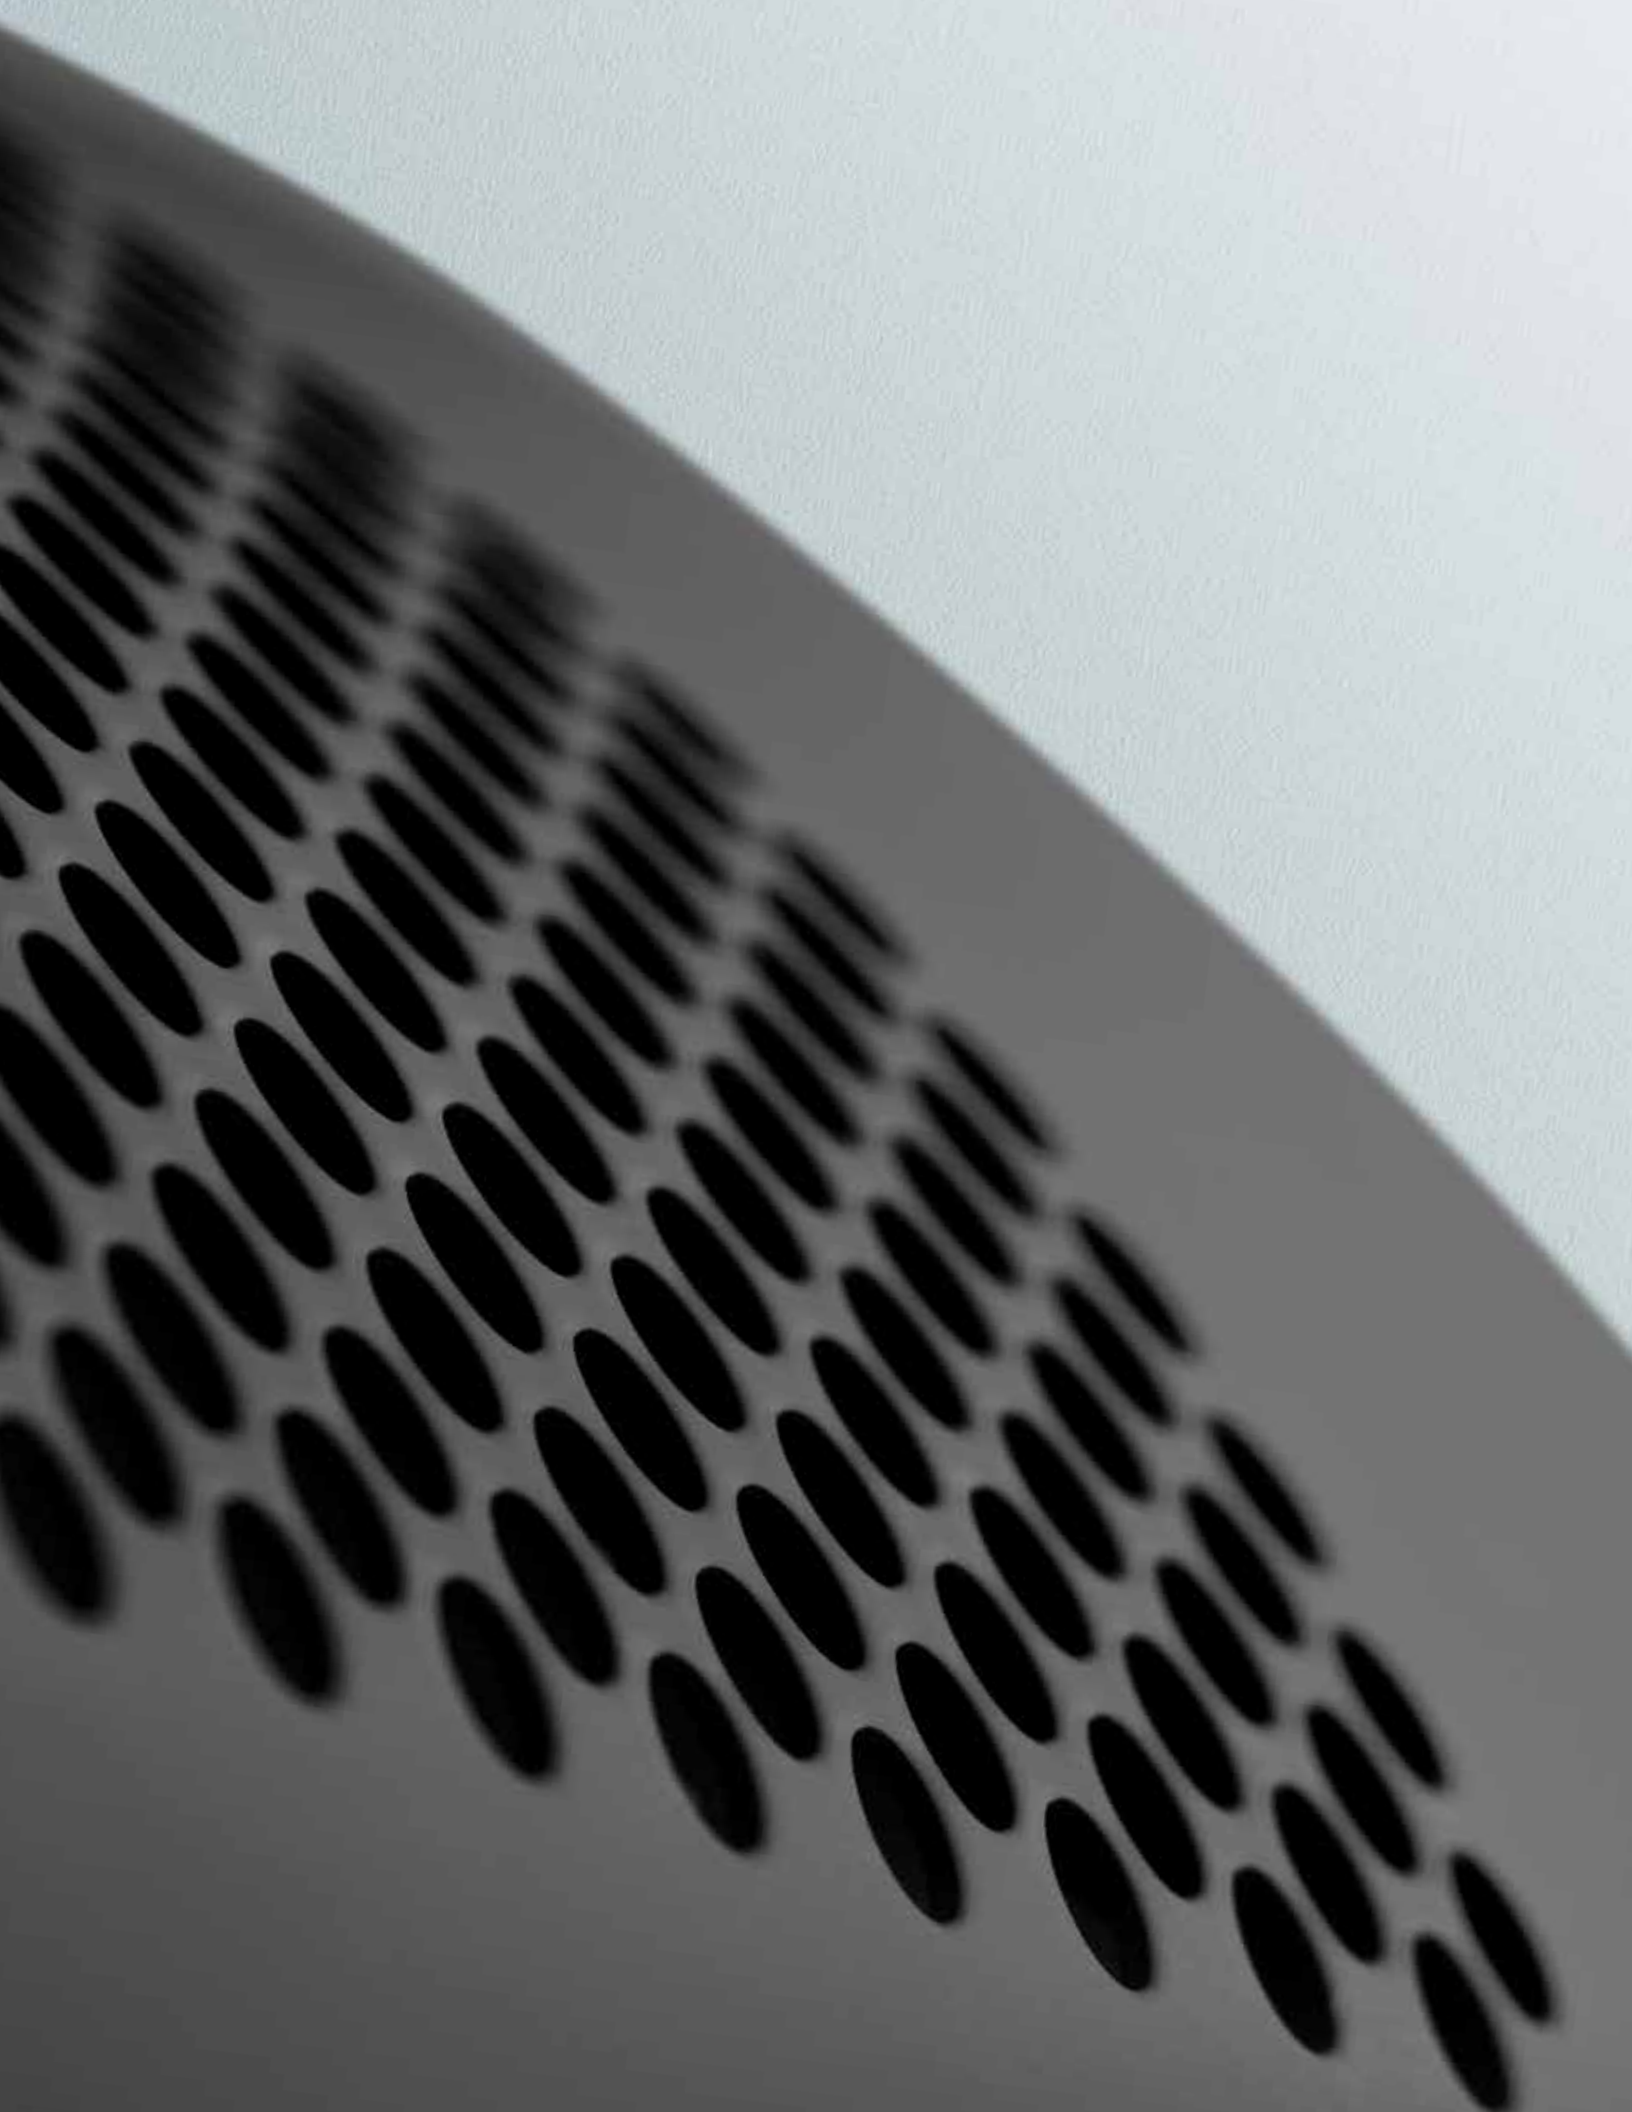


TUNGSTEN SMART-HEAT™ GAS

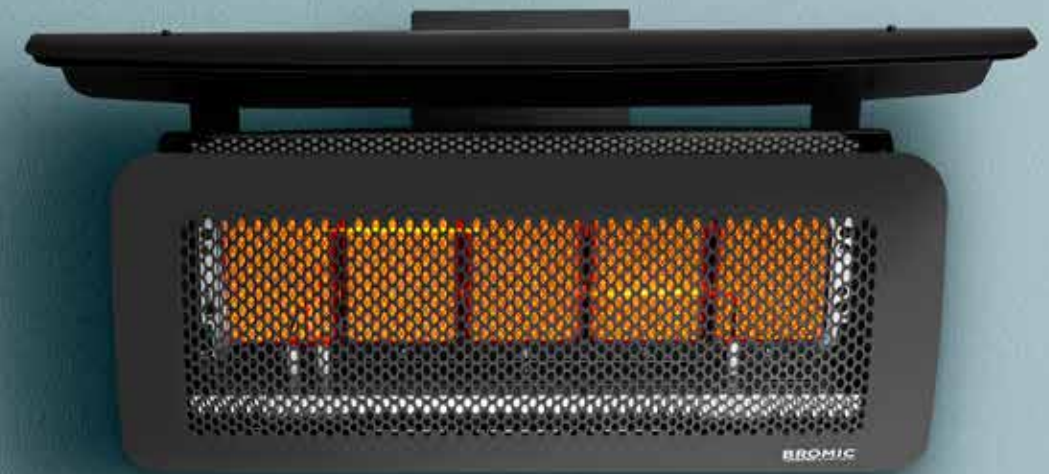

Our Tungsten Smart-Heat™ Gas heater has a durable, soft flowing curved facia and engineered body, which produces formidable heat to create a truly comfortable outdoor space. Its easy pivot arm allows for greater positioning and directional heat control. This heater also has a range of accessories available to provide versatility in mounting & controller options.

TUNGSTEN SMART-HEAT™ ELECTRIC

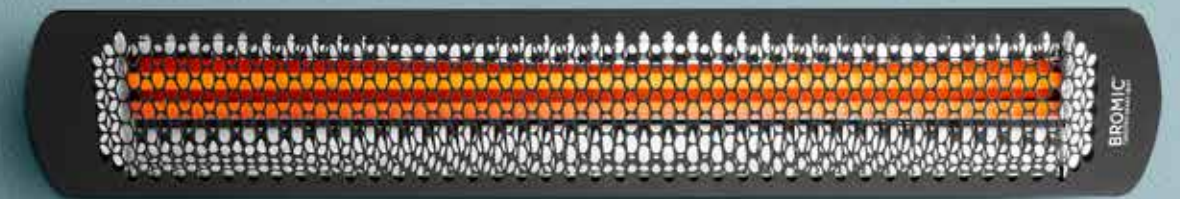

Our Tungsten Smart-Heat™ Electric series offers high performance radiant heating to outdoor and semi-enclosed spaces alike, with an industrial design style. It also boasts a high-temperature coating to suit all environments. With a stainless-steel construction, its durable element will emit a soft red glow to create a warm ambience in your space.



TUNGSTEN SMART-HEAT™ PORTABLE

It's neutral black finish, and award-winning design makes it a piece of modern art. The Tungsten Smart-Heat™ Portable heater offers efficient directional heat and a versatile heating solution for the outdoor settings. It's modular construction with built-in wheels allows for easily maneuverability throughout tighter spaces.

SMART-HEAT™ WIRELESS CONTROLLERS

With the option to connect groups of heaters from a single point as well as dimming heating outputs, the Smart-Heat™ range of controllers provide a simple, yet powerful solution to controlling your environment.

Learn more about our wireless control options
bromic.com/gowireless



DESIGN SERVICE

As part of our complementary service, Bromic Heating Specialists will custom design and tailor a solution to best heat your outdoor living and entertainment spaces.

Learn more about our design service
bromic.com/designservice



PLATINUM

SMART-HEAT™ GAS


| MODEL NUMBER | 300 SERIES | 500 SERIES |
|-------------------------|------------|------------|
| FUEL TYPE | LPG NG | LPG NG |
| COLOR | BLACK | BLACK |
| HEAT AREA | 160FT² | 215FT² |
| ELECTRICAL CONNECTION | 110V/2A | 110V/2A |
| MINIMUM FLOOR CLEARANCE | 96" | 96" |

| MOUNTING OPTIONS | | |
|------------------------|---|---|
| CEILING MOUNT | X | X |
| WALL MOUNT | X | X |
| RECESSED FLUSH MOUNT | - | - |
| CEILING POLE MOUNT | X | X |
| FREESTANDING | - | - |



| CONTROL OPTIONS | | |
|-----------------|---|---|
| ON OFF | X | X |
| DIMMER | - | - |
| MASTER REMOTE | - | - |

Measurements displayed within this catalogue are minimum requirements for installation. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this catalogue are displayed in ft and inches.


PRODUCT MEASUREMENTS
500 SERIES

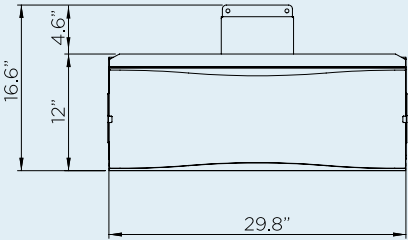



300 SERIES



PRODUCT MEASUREMENTS
WITH HEAT DEFLECTOR
500 SERIES

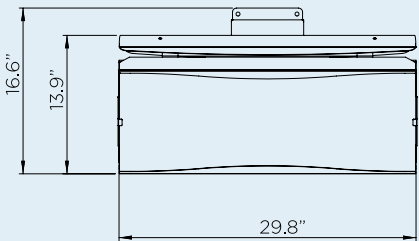


300 SERIES




WALL MOUNT
OPTIONS

WALL MOUNT
CLEARANCE

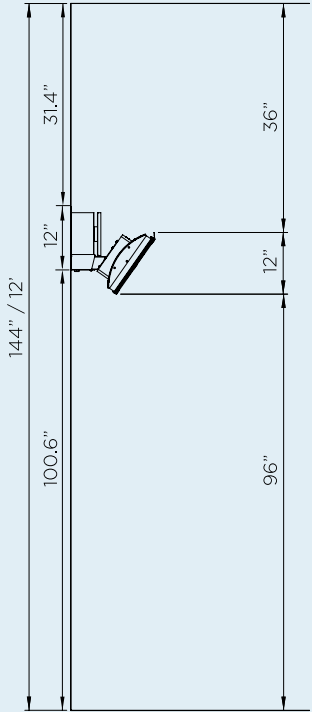


WALL MOUNT
CLEARANCE
WITH HEAT
DEFLECTOR

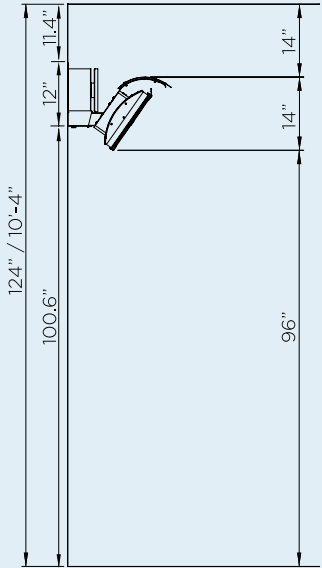


CEILING MOUNT
OPTIONS


CEILING POLE
CLEARANCE

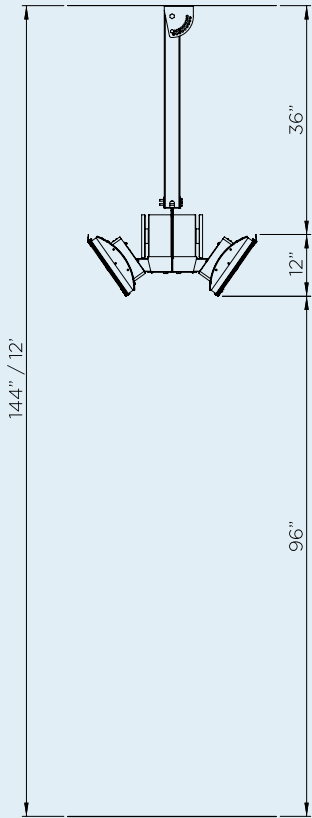

CEILING POLE
CLEARANCE
WITH HEAT
DEFLECTOR

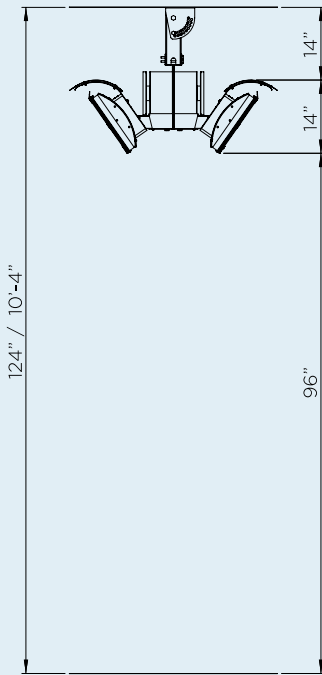

BRACKET
MEASUREMENTS



PLATINUM

SMART-HEAT™ ELECTRIC

| MODEL NUMBER | 2300W SERIES | 3400W SERIES |
|-------------------------|------------------------|------------------------|
| FUEL TYPE | ELECTRIC | ELECTRIC |
| COLOR | BLACK WHITE | BLACK WHITE |
| HEAT AREA | 65FT² | 108FT² |
| RATED CURRENT | 230 - 240V/9.6A | 230 - 240V/14.2A |
| MINIMUM FLOOR CLEARANCE | WALL 72" CEILING 96" | WALL 72" CEILING 96" |


| MOUNTING OPTIONS | | |
|------------------------|---|---|
| CEILING MOUNT | X | X |
| WALL MOUNT | X | X |
| RECESSED FLUSH MOUNT | X | X |
| CEILING POLE MOUNT | X | X |
| FREESTANDING | - | - |

| CONTROL OPTIONS | | |
|-----------------|---|---|
| ON OFF | X | X |
| DIMMER | X | X |
| MASTER REMOTE * | X | X |


Measurements displayed within this catalogue are minimum requirements for installation. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this catalogue are displayed in ft and inches.

* Control up to six zones of heaters with unlimited heaters per zone from a single control. Works only with dimming controllers. Control operates within 100 ft. of heaters



CEILING RECESS FRAME 2300W

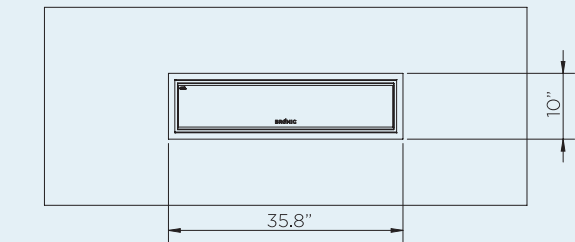



CEILING RECESS FRAME 3400W

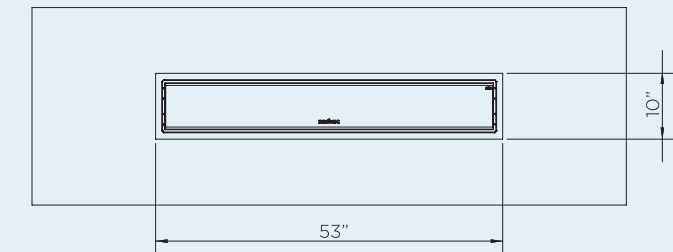


MINIMUM CAVITY OPTION 1

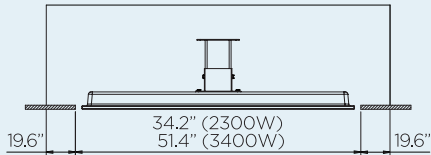


MINIMUM CAVITY OPTION 2

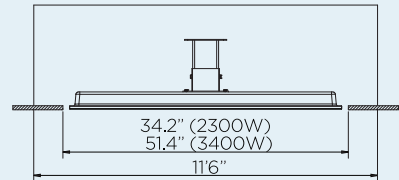


CEILING MOUNT
CLEARANCE

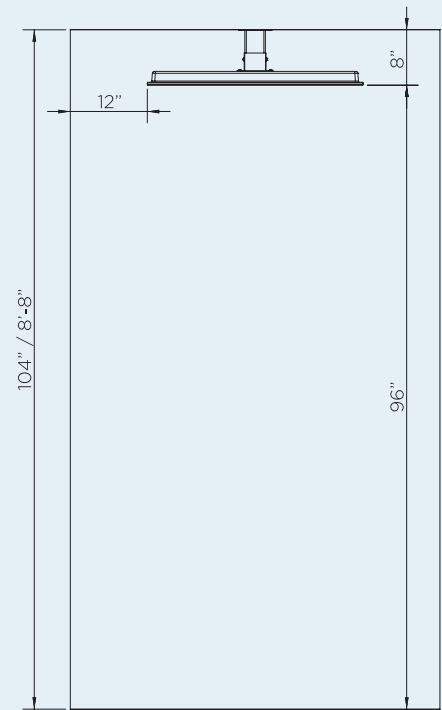


FRONT
DOWN MOUNT

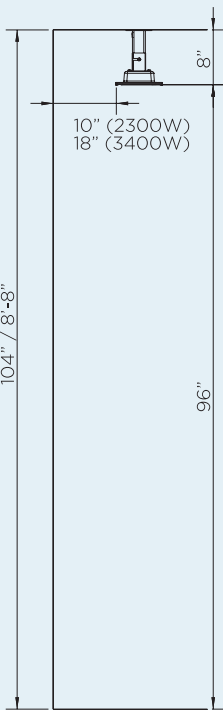

ANGLE
MOUNT

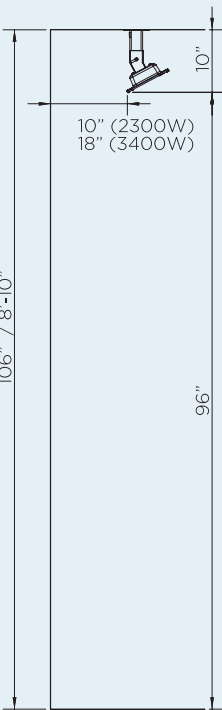


WALL MOUNT
CLEARANCE

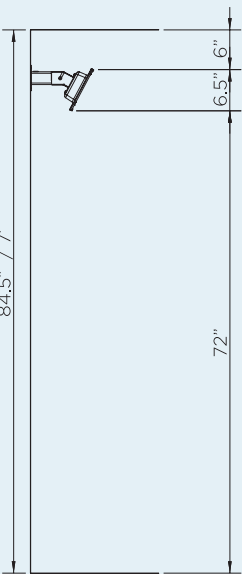


PRODUCT
MEASUREMENTS

3400W


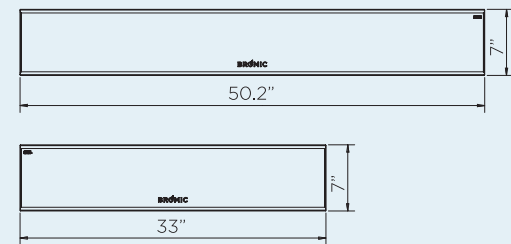


2300W

BRACKET
MEASUREMENTS

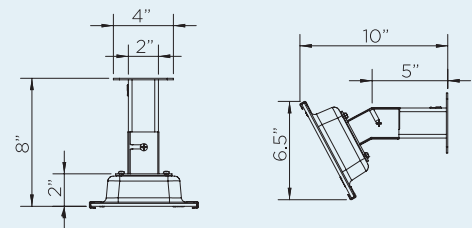

CEILING POLE
CLEARANCE

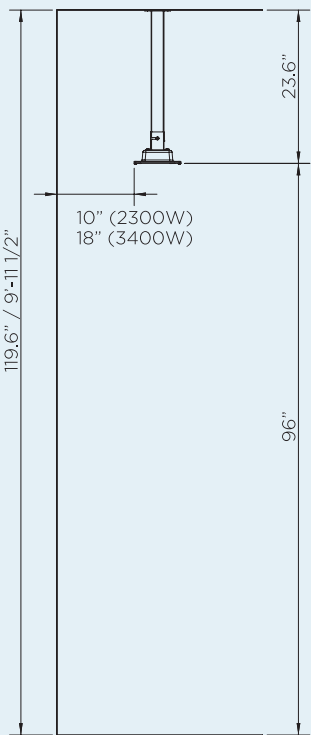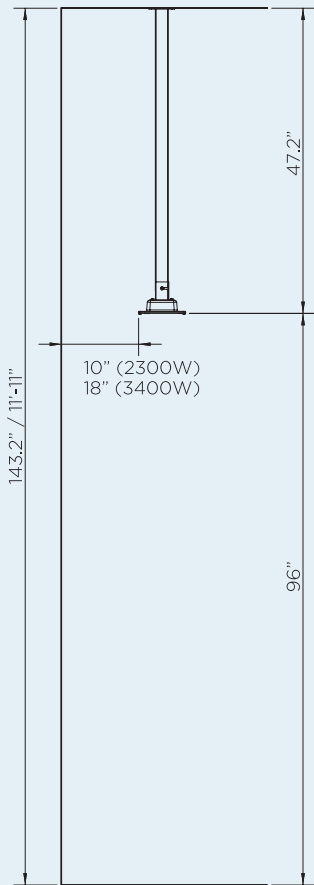

TUNGSTEN

SMART-HEAT™ GAS

| MODEL NUMBER | 300 SERIES | 500 SERIES |
|-------------------------|--------------------|--------------------|
| FUEL TYPE | LPG NG | LPG NG |
| COLOR | BLACK | BLACK |
| HEAT AREA | 160FT ² | 215FT ² |
| ELECTRICAL CONNECTION | 110V/2A | 110V/2A |
| MINIMUM FLOOR CLEARANCE | 96" | 96" |


| MOUNTING OPTIONS | | |
|------------------------|---|---|
| CEILING MOUNT | X | X |
| WALL MOUNT | X | X |
| RECESSED FLUSH MOUNT | - | - |
| CEILING POLE MOUNT | X | X |
| FREESTANDING | - | - |

| CONTROL OPTIONS | | |
|-----------------|---|---|
| ON OFF | X | X |
| DIMMER | - | - |
| MASTER REMOTE | - | - |

Measurements displayed within this catalogue are minimum requirements for installation. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this catalogue are displayed in ft and inches.


WALL MOUNT

CLEARANCES

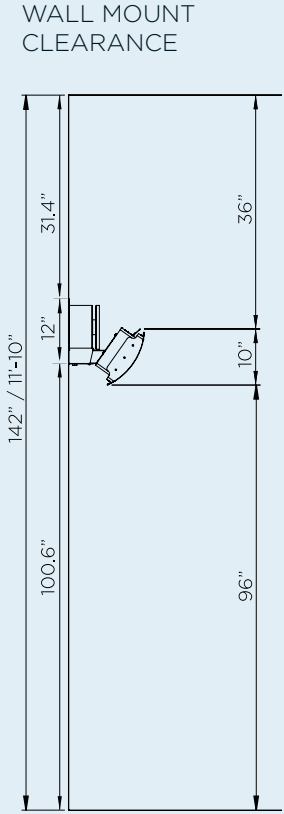


WALL MOUNT

CLEARANCE WITH HEAT DEFLECTOR

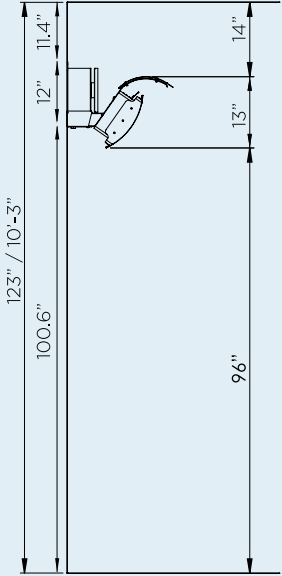


CEILING MOUNT

CLEARANCES

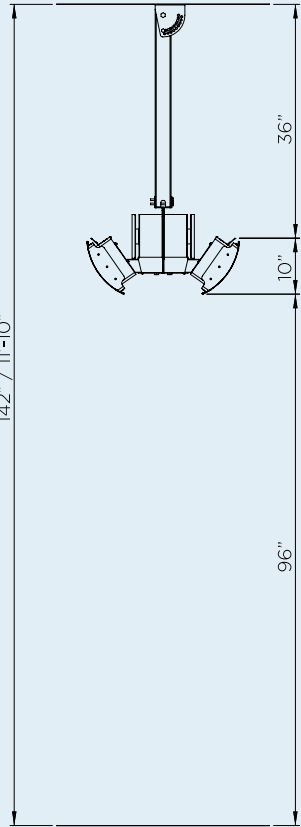


CEILING POLE

CLEARANCE WITH HEAT DEFLECTOR


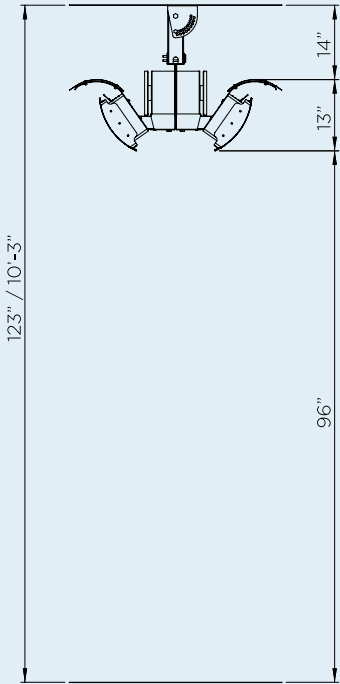


PRODUCT MEASUREMENTS

500 SERIES

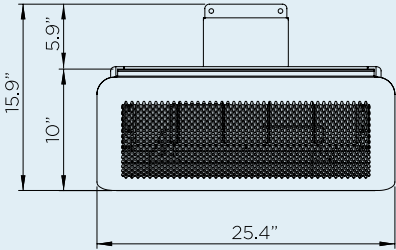


300 SERIES





PRODUCT MEASUREMENTS

WITH HEAT DEFLECTOR

500 SERIES

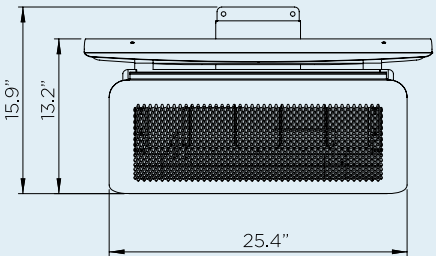


300 SERIES



BRACKET

MEASUREMENTS



TUNGSTEN

SMART-HEAT™ ELECTRIC

| MODEL NUMBER | 2000 SERIES | 3000 SERIES | 4000 SERIES | 6000 SERIES |
|---------------------------|------------------------|--------------------|------------------------|--------------------|
| FUEL TYPE | ELECTRIC | ELECTRIC | ELECTRIC | ELECTRIC |
| COLOR | BLACK WHITE | BLACK WHITE | BLACK WHITE | BLACK WHITE |
| HEAT AREA | 65FT ² | 100FT ² | 130FT ² | 160FT ² |
| RATED CURRENT | 230 - 240V/8.3A | 230 - 240V/12.5A | 230 - 240V/16.6A | 230 - 240V/25A |
| MINIMUM FLOOR CLEARANCE** | WALL 72" CEILING 96" | | WALL 72" CEILING 96" | |

| MOUNTING OPTIONS | | | | |
|------------------------|---|---|---|---|
| CEILING MOUNT | X | X | X | X |
| WALL MOUNT | X | X | X | X |
| RECESSED FLUSH MOUNT | X | X | X | X |
| CEILING POLE MOUNT | X | X | X | X |
| FREESTANDING | - | - | - | - |

| CONTROL OPTIONS | | | | |
|-----------------|---|---|---|---|
| ON OFF | X | X | X | X |
| DIMMER | X | X | X | X |
| MASTER REMOTE* | X | X | X | X |




Measurements displayed within this catalogue are minimum requirements for installation. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this catalogue are displayed in ft and inches.

* Control up to six zones of heaters with unlimited heaters per zone from a single control. Works only with dimming controllers. Control operates within 100 ft. of heaters


**Minimum Mounting hight to ground for Canada - 96" (8')

CEILING RECESS


CEILING RECESS FRAME

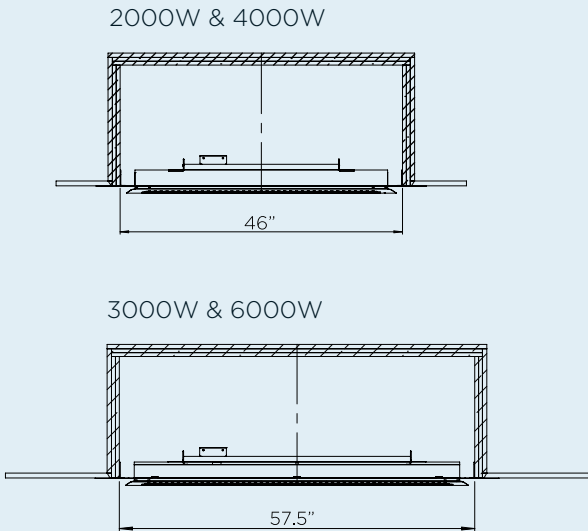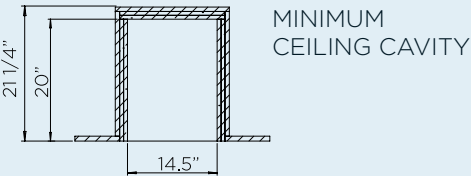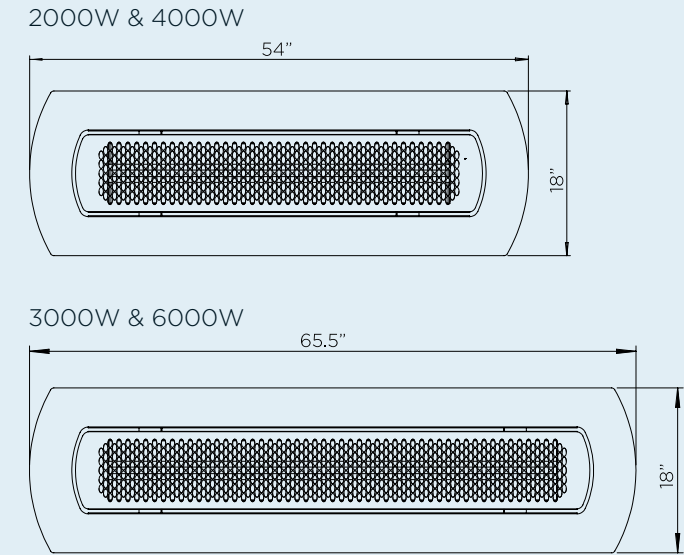


CEILING POLE
SUSPENSION CLEARANCE

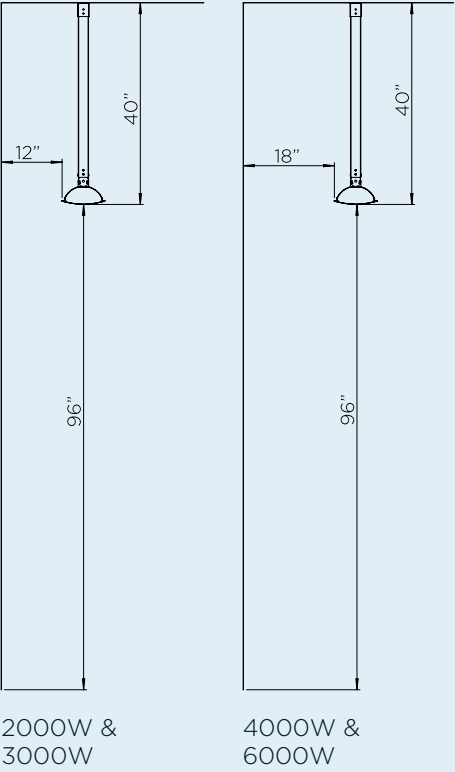


CEILING & WALL CLEARANCE
4000W & 6000W

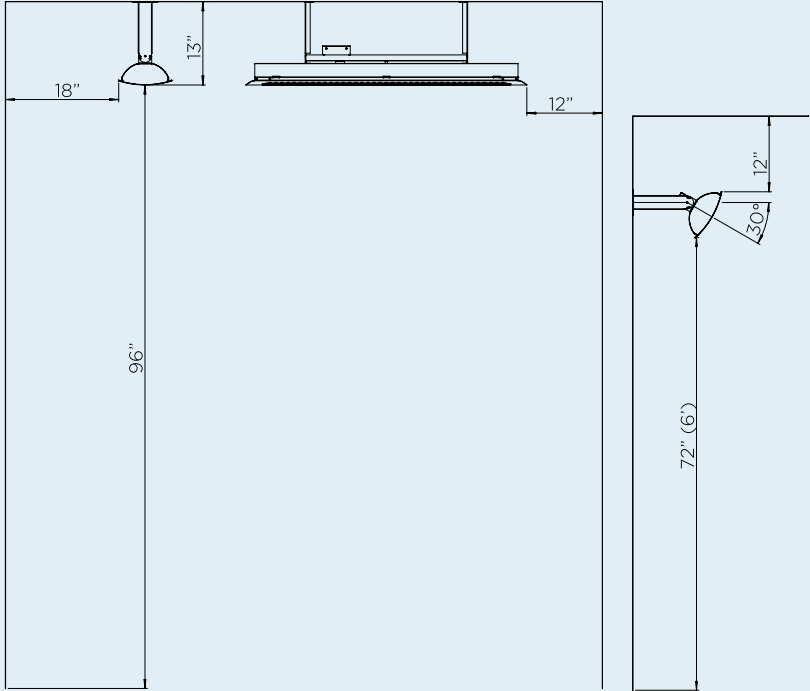


PRODUCT
MEASUREMENTS

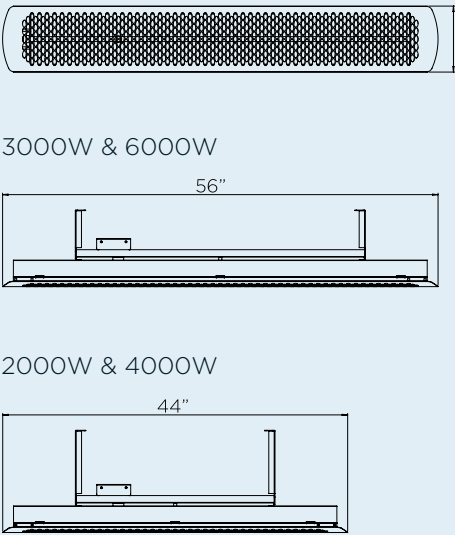

BRACKET MEASUREMENTS

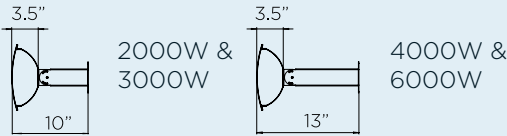

CEILING & WALL CLEARANCE
2000W & 3000W

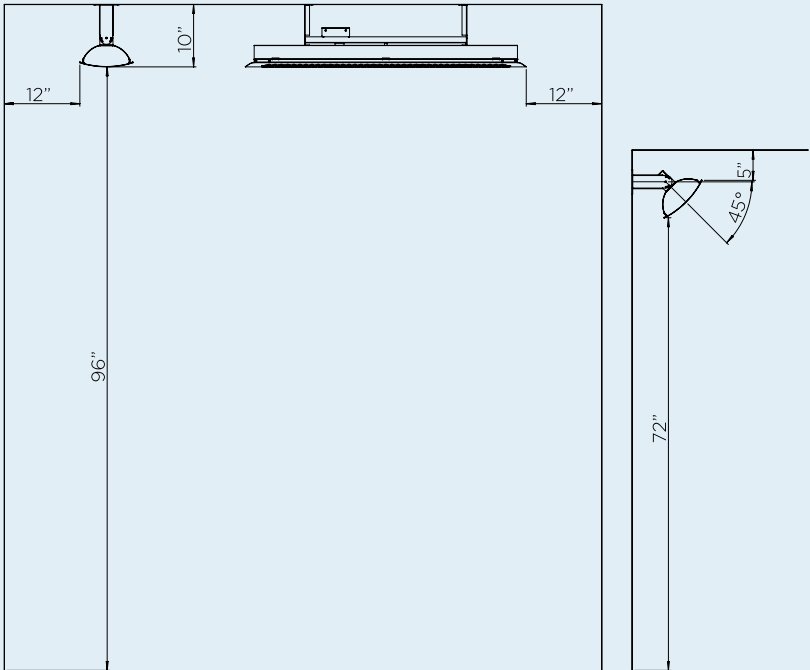

TUNGSTEN



SMART-HEAT™ PORTABLE

| MODEL NUMBER | |
|---------------------------|----------|
| FUEL TYPE | LPG NG |
| COLOR | BLACK |
| HEAT AREA | 215FT² |
| ELECTRICAL CONNECTION | - |
| MINIMUM CEILING CLEARANCE | 36" |



| MOUNTING OPTIONS | |
|------------------------|---|
| CEILING MOUNT | - |
| WALL MOUNT | - |
| RECESSED FLUSH MOUNT | - |
| CEILING POLE MOUNT | - |
| FREESTANDING | X |

| CONTROL OPTIONS | |
|-----------------|---|
| ON OFF | - |
| DIMMER | - |
| MASTER REMOTE | - |

Measurements displayed within this catalogue are minimum requirements for installation. Bromic takes no responsibility for incorrect or on-compliant installations. All measurement in this catalogue are displayed in ft and inches.

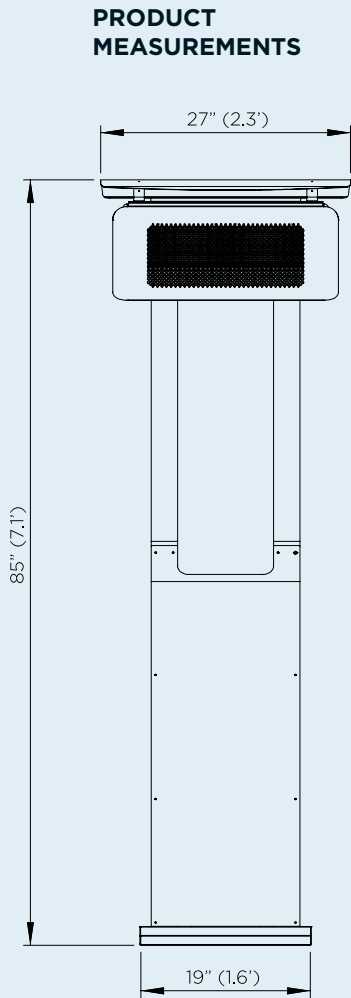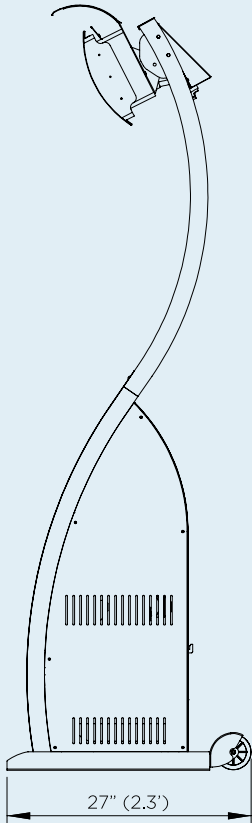

WALL & CEILING
CLEARANCE

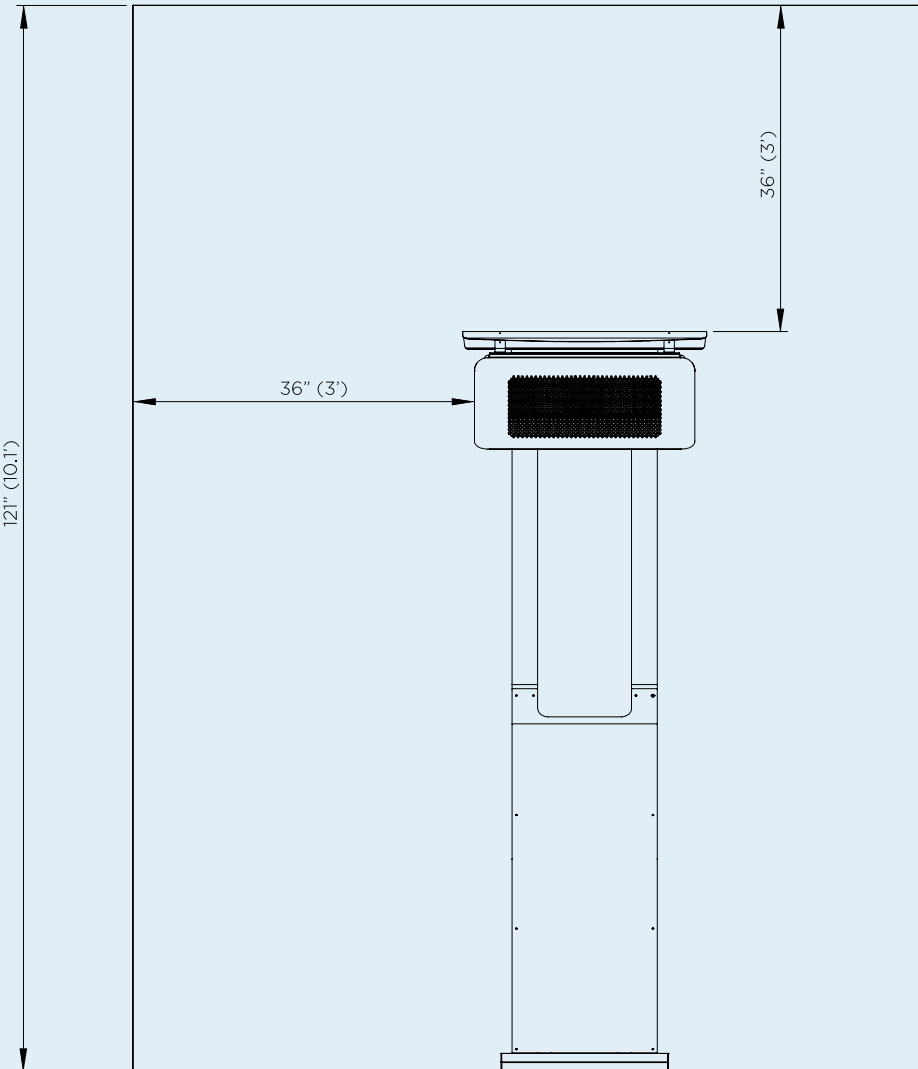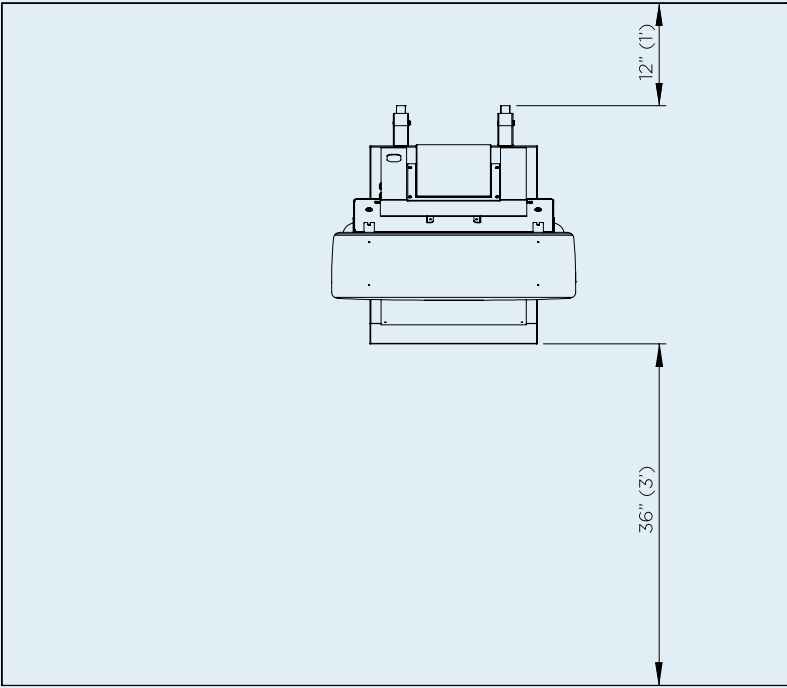



PLATINUM SMART-HEAT™ GAS
WITH OPTIONAL POLE MOUNT KIT

CONTACT BROMIC

North America

18 Technology Drive | STE 121
Irvine California 92618 USA
Tel. 1800 301 1293

Asia Pacific

10 Phiney Place
Ingleburn Sydney NSW 2565 AUS
Tel. +61 2 9426 5222

Europe

Weinauallee 19
02763 Zittau Germany
Tel. +49 358 3518 9885

BROMIC.COM/HEAT