

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

SCHOOL MILK FORCED AIR COOLER

SMF34HC Single Access Cooler Hydrocarbon Series

MODEL: SMF34HC-1-S



5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel exterior and interior
- Stainless steel lids, hinged door and door latches
- Full electronic control
- Heavy-duty epoxy coated steel wire floor racks standard
- Floor drain is centrally located for easy cleaning, connecting to drain hose with hose adapter
- Flexible compression door gaskets, ensures a tight seal
- Self-latching doors/lids with safety bumpers
- Exterior thermometer
- Cylinder lock
- 6" Heavy-duty plate casters (2 with locks)
- · Balanced, forced-air refrigeration system provides rapid chilling of product

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Corner bumpers
- Cafeteria tray slides
- Graphics

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Maintains continuous milk temperature between 36°F 40°F










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	SMF34HC-1-S	
EXTERNAL DIMENSIONAL DATA		
Width Overall (in)	34"	
Depth Overall (in)	33 %"	
Height Overall with Casters (in)	46 ½"	
Number of Lids/Doors	Single Access	
Depth with Door Open 90° (in)	48 ½"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	13.59	
Internal Width Overall (in)	31"	
Internal Depth Overall (in)	30"	
Internal Height Overall (in)	24 1/8"	
CASE CAPACITY		
13" X 13" X 11"	8	
19" X 13" X 11"	4	
ELECTRICAL DATA		
Full Load Amperes	1.87	
REFRIGERATION DATA		
Horsepower	1/4	
Capacity (BTU/Hr)	1110	
Heat Rejection (BTU/Hr)	1665	
Charge (lbs/grams)	0.187/85	
SHIPPING DATA		
Gross Weight - Crated	364 lbs	
Height - Crated	54"	
Width - Crated	39"	
Depth - Crated	38"	

School Milk Cooler - Single Access

Model: SMF34HC-1-S

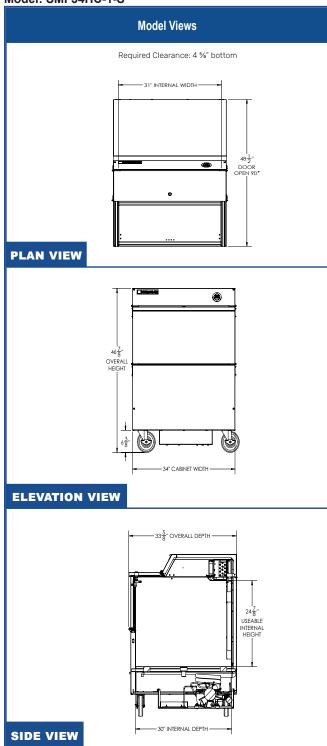



ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord

