

| Project: | AIA# |
|-----------|------|
| ltem: | |
| Location: | SIS# |
| Approved: | |

WORKTOP REFRIGERATOR

WTR72AHC Solid Door With Flat Top **Hydrocarbon Series**

MODEL: WTR72AHC-FLT



5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides, doors and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Stainless steel top for added durability
- Flat top
- Full electronic control
- Interior thermometer is standard
- Self-closing doors with 120° stay-open feature, on cartridge style hinges
- Magnetic gasket attached to each door for positive seal
- 6" Casters, two (2) with brakes standard
- Six (6) epoxy-coated steel wire shelves
- Field-reversible doors (hinge kit not included)

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Stainless steel back
- Stainless steel interior
- 16 Gauge stainless steel top
- Additional shelves
- Shelf clips
- · Glass door option
- · Right or left hinged door
- Locks (solid doors only)
- · Wire shelf divider
- Cutting board
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



| MODEL | WTR72AHC-FLT | |
|------------------------------------|---------------|--|
| EXTERNAL DIMENSIONAL DATA | | |
| Width Overall | 72" | |
| Depth Overall with Handle & Bumper | 32" | |
| Height Overall with 6" Casters | 35 %" | |
| Number of Doors | 3 | |
| Depth with Door Open 90° | 52 1⁄4" | |
| Door Openings | 19 ½" x 21 ¾" | |
| INTERNAL DIMENSIONAL DATA | | |
| NET Capacity (cubic ft.) | 17.88 | |
| Internal Width Overall (in) | 68" | |
| Internal Depth Overall (in) | 15 ¾" | |
| Internal Height Overall (in) | 23" | |
| Number of Shelves | 6 | |
| ELECTRICAL DATA | | |
| Full Load Amperes | 3.0 | |
| REFRIGERATION DATA | | |
| Horsepower | 1/5 | |
| Capacity (BTU/Hr) | 1350 | |
| Heat Rejection (BTU/Hr) | 2025 | |
| Charge (lbs/grams) | 0.2646/120 | |
| SHIPPING DATA | | |
| Gross Weight - Crated | 347 lbs | |
| Height - Crated | 44" | |
| Width - Crated | 75" | |
| Depth - Crated | 33" | |

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Worktop Refrigerator Model: WTR72AHC-FLT

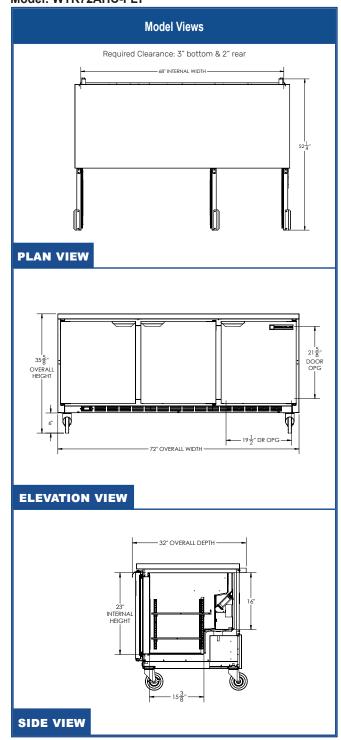



ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord