

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

MODEL: HFS1HC-1S

HORIZON TOP MOUNT REACH-IN

HFS1HC Solid Door Reach-In Freezer

Hydrocarbon Series



5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior is stainless steel front and continuous coil coated sides
- Stainless steel interior
- Full electronic control
- Expansion valve technology
- One piece grille
- LED interior light
- Self-closing door with 120° stay-open feature, on cam-lift hinges
- Field reversible door
- Door lock
- Snap-in magnetic gaskets for positive door seal
- Three (3) heavy-duty epoxy coated wire shelves
- 6" Heavy-duty casters, two (2) with brakes
- 8' Cord and plug (see electrical data for details)

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Tray slide pair, 1 tray slide set for (1) 18" x 26" or (2) 14" x 18" pans (A)
- Stainless steel universal tray slide pair,1 tray slide set for (1) 18" x 26" or (2) 14" x 18"
- Tray slide kit #4 (19 sets per half section)
- Additional epoxy shelves
- Shelf clips
- · Stainless steel breaker
- 6" Legs seismic/flanged
- 3" Casters
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- Hot gas condensate evaporator
- Adaptive Defrost
- Epoxy coated evaporator coil
- Freezer capable of maintaining product temperature down to -10°F










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	HFS1HC-1S	
EXTERNAL DIMENSIONAL DATA		
Width Overall	26"	
Depth Overall with Handle	33 3/4"	
Height Overall	85"	
Number of Doors	1	
Depth with Door Open 90°	55 ½"	
Door Opening (in)	21 %" x 61 %"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	21.06	
Internal Width Overall (in)	22"	
Internal Depth Overall (in)	26 1⁄8"	
Internal Height Overall (in)	62"	
Number of Shelves	3	
ELECTRICAL DATA		
Full Load Amperes 115/60/1	11.0	
REFRIGERATION DATA		
Horsepower	3/4	
Capacity (BTU/Hr)	1927	
Heat Rejection (BTU/Hr)	2890.5	
Charge (lbs/grams)	0.2535/115	
SHIPPING DATA		
Gross Weight - Crated	354 lbs	
Height - Crated	88"	
Width - Crated	33"	
Depth - Crated	41"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Top Mount Reach-In Freezer Model: HFS1HC-1S

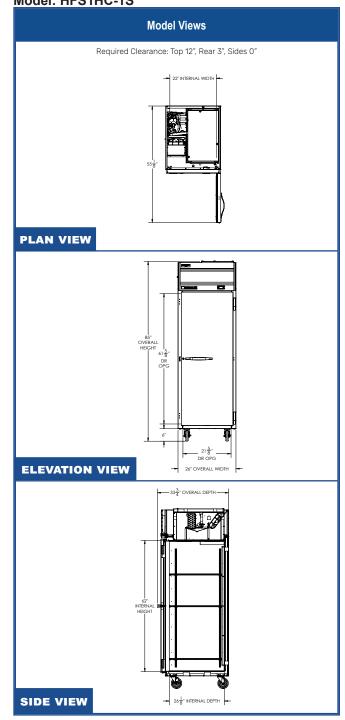

c UL us W M KCIR AQ W





Unit pre-wired at factory and include 8' long cord and plug set.