



# BEVERAGE-AIR®

Project: _____	AIA#
Item: _____	
Location: _____	SIS#
Approved: _____	

**RI18HC BOTTOM MOUNT REACH-IN: RI SERIES**

## RI REACH-IN REFRIGERATOR

RI18HC Glass Door Bottom Mount Refrigerator  
Hydrocarbon Series

**MODEL:  
RI18HC-G**



**5 Year Parts/Labor Warranty Available  
7 Year Compressor Warranty**

### CABINET CONSTRUCTION

- Stainless steel exterior and interior
- Full electronic control
- Interior LED light
- Four (4) shelves standard
- One piece grille
- Self-closing door with 120° stay-open feature, on spring loaded hinges
- Snap-in magnetic door gasket
- 3" Heavy duty casters standard

### OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Epoxy shelves & clips
- 6" Casters or 6" legs optional
- Wire shelf dividers
- Right or left hinged door
- Remote option\* (see note on back page)

### REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil
- Maintains temperature between 36° and 38°F



Please verify qualifying units by visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)

3779 Champion Blvd., Winston-Salem, NC 27105  
1-888-845-9800 Fax: 1-336-245-6453  
Beverage-Air.com Sales@bevair.com




# BEVERAGE-AIR®

MODEL	RI18HC-G
<b>EXTERNAL DIMENSIONAL DATA</b>	
Width Overall	27 ¼"
Depth Overall with Handle	29 ⅞"
Height Overall	72 ¼"
Number of Doors	1
Depth with Door Open 90°	52 ¾"
Door Opening (in)	24" x 52 ¾"
<b>INTERNAL DIMENSIONAL DATA</b>	
NET Capacity (cubic ft.)	16.85
Internal Width Overall (in)	24 ¼"
Internal Depth Overall (in)	21 ¼"
Internal Height Overall (in)	53"
Number of Shelves	4
<b>ELECTRICAL DATA</b>	
Full Load Amperes 115/60/1	5.5
<b>REFRIGERATION DATA</b>	
Horsepower	1/4
Capacity (BTU/Hr)	1997
Heat Rejection (BTU/Hr)	2995.5
Charge (lbs/grams)	0.19/86
<b>SHIPPING DATA</b>	
Gross Weight (crated lbs)	367 lbs
Height - Crated	76"
Width - Crated	30"
Depth - Crated	32"

\*NOTE: Remote units are field wired and come with 6" legs.  
Refrigerant must be specified at time of order.

## Bottom Mount Reach-In Glass Door Model: RI18HC-G

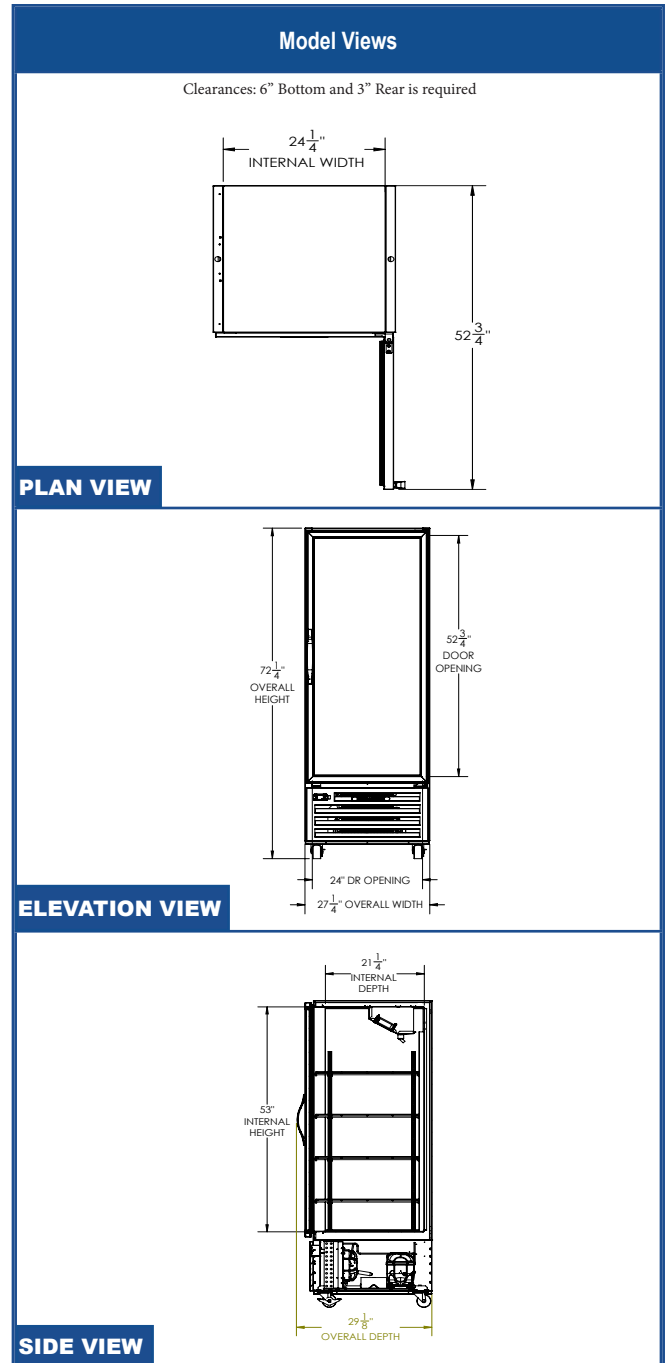

## ELECTRICAL CONNECTION



115/60/1  
NEMA 5-15P

Unit pre-wired at  
factory and include  
10.7' long cord and  
plug set.



3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevaair.com

an Ali Group Company



The Spirit of Excellence