

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

# SCHOOL MILK COLD WALL COOLER

ST58HC Dual Access Cooler Hydrocarbon Series

MODEL: ST58HC-W-02

5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty



#### **CABINET CONSTRUCTION**

- White coated steel exterior
- Stainless steel interior
- Stainless steel lids, hinged doors and door latches
- Dual sided access
- Full electronic control
- Heavy-duty epoxy coated steel wire floor racks standard
- Floor drain is centrally located for easy cleaning and connecting to drain hose with hose adapter
- Flexible compression door gaskets, ensures a tight seal
- Self-latching doors/lids with safety bumpers
- Exterior thermometer
- Cylinder locks
- 4" Heavy-duty plate casters (2 with locks)
- Cold wall milk coolers are designed to hold product temperature during service. Product should be removed at the end of service and moved to long-term, refrigerated storage

## **OPTIONS & ACCESSORIES**

- 3 Year parts/labor standard, additional 2 year warranty available
- Corner bumpers
- · Cafeteria tray slides
- Graphics

## **REFRIGERATION SYSTEM**

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- Maintains product temperature between 36°F-40°F












MODEL	ST58HC-W-02	
EXTERNAL DIMENSIONAL DATA		
Width Overall	58"	
Depth Overall	31 ¼"	
Height Overall with Casters	41 ½"	
Number of Lids/Doors	Dual Access	
Both Lids Extended	61"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	22.5	
Internal Width Overall (in)	55"	
Internal Depth Overall (in)	27"	
Internal Height Overall (in)	25 ½"	
CASE CAPACITY		
13" X 13" X 11"	16	
19" X 13" X 11"	10	
ELECTRICAL DATA		
Full Load Amperes	3.7	
REFRIGERATION DATA		
Horsepower	1/2	
Capacity (BTU/Hr)	2149	
Heat Rejection (BTU/Hr)	3223.5	
Charge (lbs/grams)	0.165/75	
SHIPPING DATA		
Gross Weight - Crated	382 lbs	
Height - Crated	48"	
Width - Crated	61"	
Depth - Crated	34"	

**School Milk Cooler - Dual Access** 

Model: ST58HC-W-02

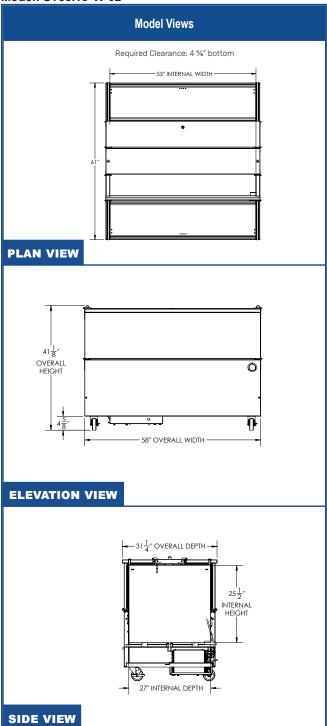



#### **ELECTRICAL CONNECTION**



Unit pre-wired at factory and include 8' long cord 115/60/1 and include 8' NEMA 5-15P and plug set.

