

## TECHNICAL DATA SHEET FOR E32T5 ON THE SK32 STAND

Full Size Electric Convection Oven  
TOUCH SCREEN CONTROL on a Stainless Steel Stand

### STANDARD FEATURES

- 5 full size sheet pan capacity
- 3 $\frac{1}{3}$ " / 85mm tray spacing
- Compact 28 $\frac{7}{8}$ " / 735mm width
- Touch Screen control
- Program and manual modes
- Icon driven program menu
- Up to 5 cooking stages
- Individual shelf timers
- USB port for program/icon updating
- Moisture injection mode (5 levels)
- 2 speed bi-directional reversing fan system
- 6.3kW heating (220-240V) / 5.6kW heating (208V)
- Safe-Touch vented side hinged door (standard LH hinge). Optional RH hinge (field convertible)
- Stay-Cool door handle
- Porcelain enameled oven chamber
- Plug-in continuous oven door seal
- Dual halogen oven lamps
- Anti-skid 2" / 50mm dia. 3" / 76mm high adjustable stainless steel feet
- 100% recyclable packaging

### ACCESSORIES

- Optional M236060 Core Temperature Probe Kit
- Turbofan SK32 Oven Stand
- DSK32 Double Stacking Kit



**THE ADVANTAGE**

### E32T5

Unit shall be a Moffat electrically heated Turbofan convection oven E.T.L. listed and NSF-4 listed. The oven shall have a one piece porcelain enameled oven chamber, stainless exterior top and sides. The oven shall have a vented safe touch side hinged door that offers field reversible hinging. Oven shall have capacity for 5 full size sheet pans. The oven shall have selectable moisture level injection and a 2 speed oven fan. The oven shall be controlled by a 5.7" Touch Screen control with manual and recipe operating modes with icon driven recipe programs and individual shelf control operation mode and multiple stage cooking. Oven controller shall have USB port for recipe file uploading and downloading. A core temperature probe M236060 is optional. The oven shall include dual halogen oven lamps. The oven shall be able to be bench mounted on 3" feet or mounted on oven stand model SK32. Unit shall be supplied in 100% recyclable shipping packaging.

### SK32

Unit shall be a Moffat Turbofan stainless steel oven stand NSF-4 listed. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 6 tray runners suitable for up to 12 half size sheet pans or 6 full size sheet pans. The stand shall be fully compatible with, and support, Turbofan Convection Oven models E32D5, E32T5 and G32D5. Unit shall be supplied in 100% recyclable shipping packaging.

### E32T5 Full Size Convection Oven TOUCH SCREEN CONTROL

#### CONSTRUCTION

Porcelain enameled fully welded oven chamber  
Stainless steel front, sides and top exterior  
Stainless steel oven fan baffle and oven vent  
Removable 5 position stainless steel side racks  
Oven racks chrome plated wire (5 supplied)  
Stainless steel frame side hinged door  
0.2" / 5mm thick door outer glass  
0.2" / 5mm thick low energy loss door inner glass  
Full stainless steel welded door handle  
Stainless steel control panel  
Aluminized coated steel base and rear panels

#### CONTROLS

5.7" LED backlit touch screen  
Icon driven program menu  
BMP image icon imports via USB port  
Program updates via USB port  
Temperature range 85-500°F  
Adjustable sounder tones and volume  
Other specification on request  
Safety thermostat cut-out  
Optional core temp probe

#### CLEANING

Stainless steel top and side exterior panels  
Porcelain enameled oven chamber  
Fully removable stainless steel oven side racks  
Removable stainless steel oven fan baffle  
Easy clean door system with hinge out door inner glass (no tools required)  
Removable plug-in oven door seal (no tools required)  
3" / 76mm high stainless steel feet for easy access underside

#### SPECIFICATIONS

##### Electrical Requirements

208V, 60Hz, 1-phase, 5.8kW, 28A  
220-240V, 60Hz, 1-phase, 6.5W, 27A  
No cordset supplied

##### Water Requirements (optional)

Cold water connection ¾" GHT male  
80psi maximum inlet pressure / 20psi minimum inlet pressure

##### External Dimensions

Width 28 7/8" / 735mm  
Height 28 3/4" / 730mm including 3" / 76mm feet  
Depth 31 7/8" / 810mm

##### Oven Internal Dimensions

Width 18 1/4" / 465mm  
Height 20 1/4" / 515mm  
Depth 27 1/2" / 700mm  
Volume 6ft³ / 0.17m³

#### Oven Rack Dimensions

Width 18" / 460mm  
Depth 26" / 660mm

#### Nett Weight (E32T5)

196lbs / 89kg

#### Packing Data (E32T5)

231lbs / 105kg  
20.1ft³ / 0.57m³  
Width 29 7/8" / 760mm  
Height 32" / 815mm  
Depth 36 3/8" / 925mm

### SK32 Stainless Steel Stand

All stainless steel welded frame oven stand for Turbofan E32D, E32T and G32D Series ovens

6 position tray runners standard  
3" / 76mm diameter wheel swivel castors standard with 2 front castors with dual swivel and wheel  
Welded 1 1/2" and 1 1/4" square tube front and rear frames  
Welded rack supports/side frames  
4 dia. 3" / 76mm swivel castors with 2 front castors dual wheel and swivel lock  
Top frame oven supports suit Turbofan E32D, E32T and G32D Series oven mounting  
Supplied CKD for assembly on site

#### External Dimensions (SK32 Oven Stand)

Width 28 7/8" / 735mm  
Height 34 5/8" / 880mm  
Depth 25 5/8" / 650mm

#### Nett Weight (SK32 Oven Stand)

40lbs / 18.5kg

#### Packing Data (SK32 Oven Stand)

51lbs / 23kg  
3.5ft³ / 0.1m³  
Width 32 5/8" / 830mm  
Height 35 1/2" / 900mm  
Depth 6" / 152mm

#### INSTALLATION CLEARANCES

Rear 2" / 50mm  
LH Side 2" / 50mm  
RH Side\* 3" / 75mm

\* For fixed installations a minimum of 20" / 500mm is required for service

#### CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 12" / 300mm from the appliance sides is required

## MOFFAT®

www.moffat.com

U.S.A.

Moffat Inc  
3765 Champion Boulevard  
Winston-Salem

North Carolina 27105

Ph Toll Free 1-800-551 8795

Ph 336-661 0257


Fax 336-661 9546

Email sales@moffat.com

www.moffat.com

Manufactured by:

Moffat Limited  
16 Osborne Street PO Box 10-001  
Christchurch 8081 New Zealand

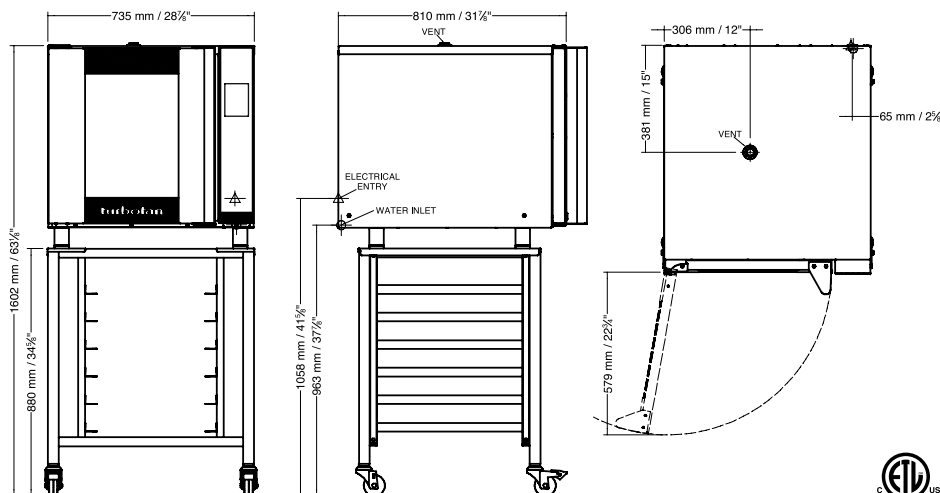

ISO9001  
Quality  
Management  
Standard

Designed and manufactured by



ISO9001

All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd  
Moffat 1318 / 1.13

