



# Combi steamer

Project \_\_\_\_\_

Item \_\_\_\_\_

Quantity \_\_\_\_\_

FCSI section \_\_\_\_\_

Approval \_\_\_\_\_

Date \_\_\_\_\_

C4eT 20.20 GB

## Model

Convotherm 4 easyTouch

- easyTouch
- 20 slide rails
- Gas
- Boiler
- Right-hinged door



## Key features

- ACS+ operating modes: Steam, combi-steam, hot air
- ACS+ extra functions:
  - Crisp&Tasty - 5 moisture-removal settings
  - BakePro - 5 levels of traditional baking
  - HumidityPro - 5 humidity settings
  - Controllable fan - 5 speed settings
- easyTouch 9" full-touch screen
- ConvoClean+ fully automatic cleaning system with eco, regular and express modes - with optional single-dose dispensing
- Ethernet interface (LAN)
- HygienicCare
- USB port integrated in the control panel
- TriColor indicator ring - indicates the current operating status
- Steam generated by high-performance boiler outside the cooking chamber
- Right-hinged door

## Standard features

- ACS+ (Advanced Closed System +) operating modes:
  - Steam (86-266°F) with guaranteed steam saturation
  - Combi-steam (86-482°F) with automatic humidity adjustment
  - Hot air (86-482°F) with optimized heat transfer
- HygienicCare - food safety provided by antibacterial surfaces:
  - easyTouch control panel
  - Door handle and recoil hand shower
- easyTouch user interface:
  - 9" full-touch screen
  - Press&Go - automatic cooking with quick-select buttons
  - TrayTimer - oven-load management for different products at the same time
  - Regenerate+ - flexible multi-mode retherm function
  - ecoCooking - energy-save function
  - Low-temperature cooking / Delta-T cooking
  - Cook&Hold - cook and hold in one process
  - 399 cooking profiles each containing up to 20 steps
  - On-screen help with topic-based video function
  - Start-time preset
- Multi-point core temperature probe
- Door handle with safety latch
- Integral preheat bridge
- Data storage for HACCP and pasteurization figures
- Preheat and Cool down function
- One (1) loading trolley

## Options

- Disappearing door – more space and added safety (see page 2)
- ConvoGrill with grease management function (upon request)
- Available in various voltages
- Sous-vide probe, external connection
- Core temperature probe, external connection


## Accessories

- ConvoLink HACCP and cooking-profile management PC software
- Signal tower - indicates the operating status from a distance
- Banquet system (optionally as a package or individually): Plate loading trolley, loading trolley, thermal cover
- Cleaning products for the fully automatic ConvoClean+ cleaning system and the semi-automatic cleaning system




**Front view**

(disappearing door optional)

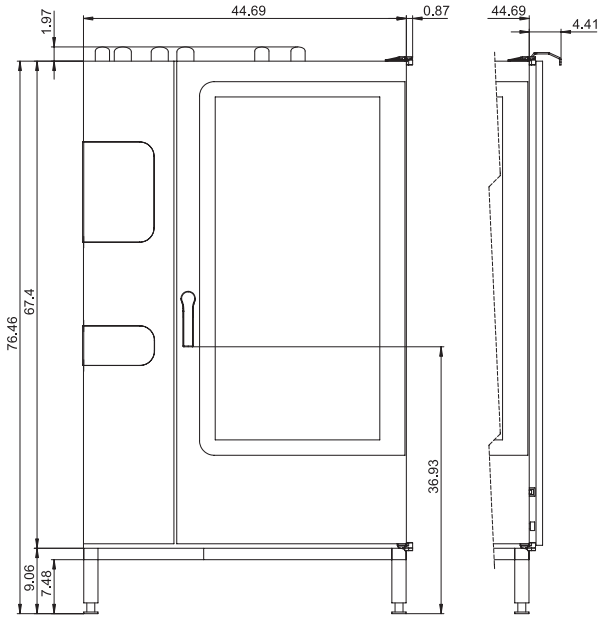


**Connection positions**

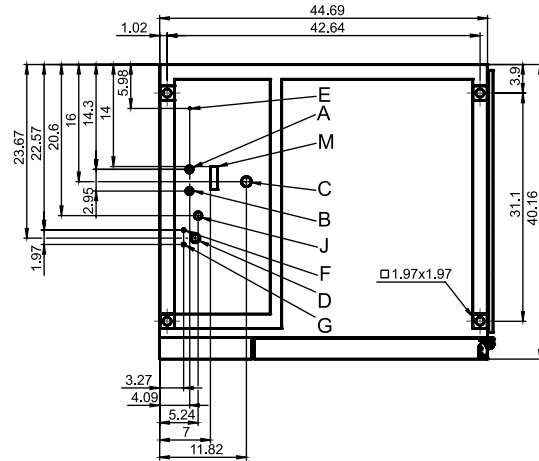

- A** Water connections (for boiler)
- B** Water connections (for cleaning, recoil hand shower)
- C** Drain connection (2" I. D.)
- D** Electrical connection
- E** Electrical ground
- F** Rinse-aid connection
- G** Cleaning-agent connection
- H** Air vent (2" I. D.)
- I** Ventilation port
- J** Gas connection
- K** Exhaust outlet (cooking compartment heating element)
- M** Safety overflow 3.2" x 1"

**View from above with wall clearances**

(disappearing door optional)

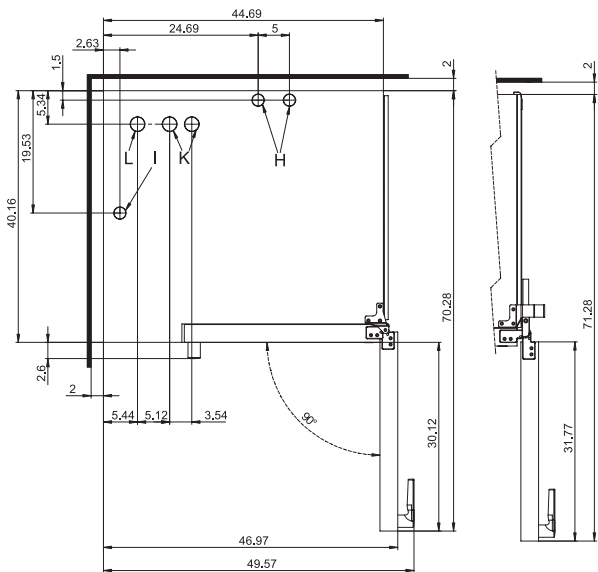

**Dimensions and weights**

**Dimensions including packaging**

Width x Height x Depth 55.5" x 84.7" x 46.1"

**Weight**

Net weight without options\* / accessories 864 lbs

Packaging weight 106 lbs

**Safety clearances\*\***

Rear 2"

Right (right-hinged door) 2"

Right (disappearing door pushed back) 6"

Left (18" clearance recommended for service) 2"

Top\*\*\* 39"

\* Max. weight of options: 59 lbs.

\*\* Minimum clearance from heat sources: 20".

\*\*\* Depends on the type of exhaust system and the ceiling's characteristics.

**Installation requirements**

Max. absolute appliance inclination during operation\* max. 2° (3.4%)

\* Adjustable appliance feet as standard.

### Loading capacity

**Max. number of food containers**

[Unit has 20 slide rails; rail spacing 2.68" max.]

|   |    |
|---|----|
| Steam table pans (12"x20"x1")           | 40 |
| Steam table pans (12"x20"x2.5")         | 40 |
| Wire shelves, full size (20"x26")       | 20 |
| Sheet pans, full size (18"x26")*        | 20 |
| Sheet pans, half size (12"x20")*        | 40 |
| Frying baskets, half size (12"x20")     | 40 |
| Plates (optional plate banquet trolley) | 98 |

**Max. loading weight**

|                   |         |
|-------------------|---------|
| Per combi steamer | 397 lbs |
| Per shelf level   | 33 lbs  |

\* Wire shelves required.

### Electrical supply

**120V 1PH 60Hz \***

|                             |              |
|-----------------------------|--------------|
| Rated power consumption     | 1.1 kW       |
| Rated current               | 10.6 A       |
| Power supply wire gauge     | 14 AWG       |
| Conductor insulation rating | 194°F / 90°C |

\* Prepared for connection to an energy optimizing system.

### Water connections

**Water supply**

|               |  |
|---------------|--|
| Water supply  | Two 3/4" I. D. GHT-M (garden hose adapter). The appliance is designed for a permanent hookup to the water supply that uses a connecting hose with a minimum diameter of 1/2" |
| Flow pressure | 22 - 87 PSI / 1.5 - 6 bar  |

**Drain**

|                     |  |
|---------------------|--|
| Drain version       | Permanent hookup (recommended) or open pan or duct / channel |
| Type                | 2" I. D. (comes elbow-shaped as standard)                    |
| Slope for drainpipe | min. 3.5% (2°)   |

### Water quality

**Water connection A\* for boiler, Water connection B\* for cleaning, recoil hand shower**

|   |   |
|---|---|
| General requirements                    | Drinking water, typically untreated water |
| TDS                                     | 70 - 360 ppm                              |
| Hardness                                | 70 - 360 ppm (4 - 21 gpg)                 |
| pH value                                | 6.5 - 8.5                                 |
| Cl <sup>-</sup> (chloride)              | max. 60 ppm                               |
| Cl <sub>2</sub> (free chlorine)         | max. 0.2 ppm                              |
| SO <sub>4</sub> <sup>2-</sup> (sulfate) | max. 150 ppm                              |
| Fe (iron)                               | max. 0.1 ppm                              |
| SiO <sub>2</sub> (silica)               | max. 13 ppm                               |
| NH <sub>2</sub> Cl (monochloramine)     | max. 0.4 ppm                              |
| Temperature                             | max. 104°F / max. 40°C                    |

\* See connection positions diagram, p. 2.

NOTICE: The owner/operator/purchaser must ensure that the water quality requirements are met. Otherwise the original equipment warranty is void.

**Emissions**

|                          |                   |
|--------------------------|-------------------|
| <b>Heat emission</b>     |                   |
| Latent                   | 11600 BTU/h       |
| Sensitive                | 14600 BTU/h       |
| <b>Drain temperature</b> | max. 140°F / 60°C |
| <b>Decibel rating</b>    | max. 70 dBA       |

**Water consumption**

|                                   |          |
|-----------------------------------|----------|
| <b>Water connections A, B</b>     |          |
| Average consumption for cooking** | 3.54 gph |
| Required flow rate                | 3.96 gpm |

\*\* Incl. water required for cooling the wastewater.

NOTICE: See connection positions diagram, p. 2.

**Gas specifications**

|                          |                      |
|--------------------------|----------------------|
| Type of gas              | Natural gas, propane |
| Gas connection           | 3/4" NPT             |
| <b>Flow pressure</b>     |                      |
| Natural gas              | 5.5 - 14" WC         |
| Propane                  | 11 - 14" WC          |
| <b>Heat output</b>       |                      |
| For Natural gas, propane |                      |
| Convection burner        | 218400 BTU/h         |
| Boiler burner            | 109200 BTU/h         |

**Please note:**

- Please refer to the Installation manual for further technical data and for instructions on installation and setup.
- Convotherm reserves the right of design improvement or modification, as warranted.
- There are numerous federal, national and local laws, regulations and standards. It is the responsibility of the owner and installer to observe these laws, regulations and standards (e.g. fire regulations and health and safety standards).
- Convotherm combi steamers are built to comply with the applicable standards for manufacturers.

9758275\_04 ENG\_ USA 05/15. © 2015 Manitowoc. Please note that the product is being continuously improved and that, as a result, these specifications are subject to change without notice.