Air Deck Gas Deck Ovens

Garland Air Deck Gas Deck Ovens

Item:	
Quant	ity:
Projec	t:
	val:
Date:	

M	lod	اما	lς	•

☐ G56PB

☐ G56PT

☐ G56PT/B



Standard Features:

- Stainless Steel Front,
 Sides, Top, Back and Legs
- Porcelainized Control Panel
- Full Deck Width, Balanced Spring-Loaded Door
- Stainless Steel Perforated Deck
- Adjustable Legs
- Electronic Ignition
- Snap Action Thermostat (550° F Max.)
- Heat Control Damper System

- Forced Air Combustion Burner; 80,000 BTU
- Single Speed Fan with ¾
 HP Motor
- 55.5"W x 35.75"D Deck Surface
- 63"W x 45"D Floor Space
- 53"W' x 7½"H Door Opening
- One Year Limited Parts and Labor Warranty (USA & Canada only)

Optional Features:

Direct Connect Vent - No charge

AIR DECK

Specifications:

Unique energy delivery system driven by controlled hot air flow designed for high volume operation. Offers minimum preheat time; no recovery time; consistent selected temperatures; high quality production, and menu versatility. Available in natural or propane gas.







Model G56PT/B







MODEL	INPUT	DECK:	DECK : In (mm)		MOTOR	C E4	Ship WT.
MODEL	(BTU)	WIDTH	DEPTH	CAPACITY	MOTOR	Cu Ft	lb/Kg
G56PB	80,000	35.75(908)	55.5(1410)	(6) 18"	120V, 1PH, 60Hz	95	1000 /455
G56PT	80,000	35.75(908)	55.5(1410)	(6) 18"	15 Amps	95	1000 /455
G56PT/B	160,000	2@35.75(908)	2 @55.5(1410)	(12) 18"	(1 per deck)	190	2000 /910

Gas input ratings shown here are for installations tip to 2,000 feet (610mm) above sea level. BTU input ratings must be derated for high altitude installations.

	MANIFOLD OPERATING PRESSURE		MINIMUM CLEARANCES				
			Installation to Combustible Wall			Entry	
	Nat	Pro	Sides	Rear	Base	Crated	Uncrated
	3.5" WC	10.0" WC	6" (152mm)	6" (152mm)	8" (203mm)	45" (1143mm)	35-1/2" (902mm)

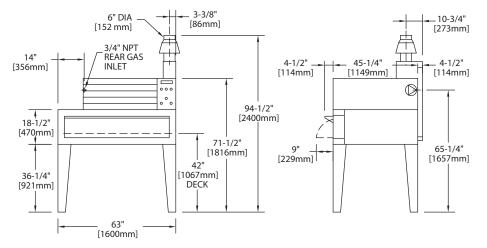

Deck with top power module and Direct Connect Venting

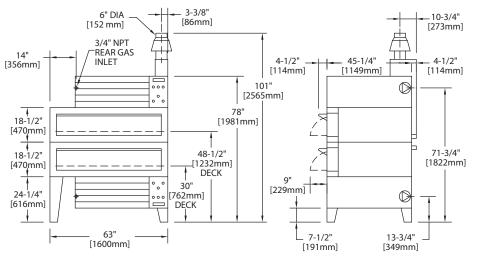

Deck (1) top power module (1) bottom power module and Direct Connect Venting

Form# G56 (05/03/13)

