

# SPIKA NG 230

115 V / 60 Hz

## SELF-CONTAINED ICE CUBE MACHINE

### FEATURES

- ▶ PRODUCES FULL DICE ICE CUBES OR HALF DICE ICE CUBES.
- ▶ STIF: STRONG INOX FRAME. SOLID MACHINE STRUCTURE IN 4 COLUMNS WITH AISI 304 STAINLESS STEEL FRAME.
- ▶ STRONGEST DOOR IN THE MARKET. MADE OF STAINLESS STEEL. OPENING AND DAMPING SYSTEM PATENTED BY ITV.
- ▶ SMART FRONT VENTILATION SYSTEM, (SFVS) ALLOWS BUILT-IN INSTALLATION OF THE UNIT.
- ▶ CLEANING SWITCH: ALLOWS CIRCULATION OF WATER WITH DESCALING PRODUCT (CALKIN OR SIMILAR) WITHOUT COOLING.
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. PUMP WITHOUT SEALS, WHICH AVOIDS DETERIORATION IN HARD WATER.
- ▶ EASI: EASY ACCESS FOR SERVICE & INSTALLATION. ALL PANELS CAN BE DISASSEMBLED SEPARATELY.
- ▶ ELECTRONIC CONTROL THAT ENHANCES THE PERFORMANCE OF THE MACHINE AND ALLOWS IT TO ADAPT TO EXTREME CLIMATES.
- ▶ NATURAL GAS R290 WITH VERY LOW GLOBAL WARMING POTENTIAL WHICH ALSO REDUCES THE ENERGY CONSUMPTION.
- ▶ LED ON/OFF SWITCH / PCB MOUNTED AT THE BOTTOM.
- ▶ TROPICALIZED MACHINES (T CLASS) / STAINLESS STEEL ADJUSTABLE LEGS.



	24 H	70°F/20°C	50°F/10°C	90°F/32°C	70°F/21°C	<b>lbs (Kg)</b>	<b>in (mm)</b>	<b>in (mm)</b>	<b>SPIKA HALF DICE</b> 0.9" (W) x 0.43" (D) x 1.02" (H) 23 mm (W) x 11 mm (D) x 26 mm (H) Average dimensions
SPIKA NG 230 H		<b>231 (105)</b>	<b>176 (80)</b>	<b>77 (35)</b>	Width <b>25.99"</b> (660)	Width <b>29.14"</b> (740)	<b>SPIKA FULL DICE</b> 1.02" (W) x 0.9" (D) x 1.02" (H) 26 mm (W) x 23 mm (D) x 26 mm (H) Average dimensions		
SPIKA NG 230 F		<b>231 (105)</b>	<b>176 (80)</b>		Depth <b>27.56"</b> (700)	Depth <b>28.35"</b> (720)		Height* <b>32.76"</b> (832)	Height <b>37.6"</b> (955)

\* WITH LEGS 39"

### ACCESSORIES

#### INCLUDED



6" HEIGHT ADJUSTABLE LEG KIT



SCOOP

#### NOT INCLUDED



10" FILTER  
ANTI-LIMESCALE + ANTI-CHLORINE  
**CS-101 K**




10" REPLACEMENT CARTRIDGE  
ANTI-LIMESCALE + ANTI-CHLORINE  
**CS10**



SCALE KLEEN

# TECHNICAL SCHEME

SPIKA NG 230

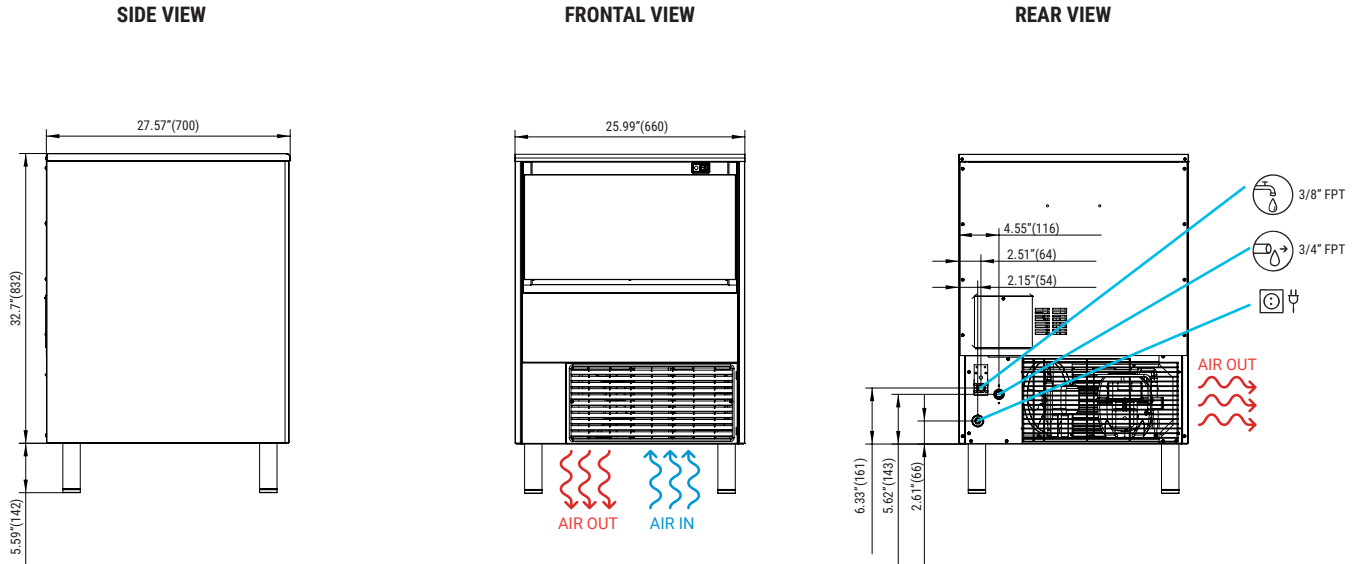

\* All dimensions in inches (and mm)

## OPERATING CONDITIONS

### PRODUCTION (LBS) 60Hz

- ±10% V
- 41°F/109°F
- 41°F/95°F
- 14,5 psi (1 bar) /87 psi(6 bar)
- 120/240 Ice cubes/cycle



V	Hz	ph
115	60	1N

MODELS	Kwh/100 lbs	Water Usage (Gal/100 lbs)	Ice Production (70/50)	Ice Production (90/70)	External Dimensions (inches)			Voltage /Hz /ph	Amp	Heat Rejected (BTU/hr)	Net Weight (lbs)	Crated Weight (lbs)
					W	D	H					
SPIKA NG 130 H	3.74	26.62	231	176	25.99	27.56	32.76	115/60/1	5.2	2,806	141	167.5
SPIKA NG 130 F	3.74	26.62	231	176	25.99	27.56	32.76	115/60/1	5.2	2,806	141	167.5

0000\_itvice/en\_25/K/22



ITV Ice Makers, Inc.  
 9550 Satellite Blvd, Suite 100  
 Orlando, FL 32837  
 Phone: 1 407 826 1860 | Fax: 1 407 826 1861  
 Toll Free: 1 888 488 1423  
 sales@itvice.com | www.itvice.com



SERVICE  
 service@itvice.com  
 Skype: service@itvice.com  
 PHONE: +1 888 488 1423  
 FROM 8AM TO 5PM EST



**2 ADDITIONAL YEARS ON COMPRESSOR & EVAPORATOR**  
 Read our warranty policy to know more about limitations and exclusions

