

# SPIKA NG 130

115 V / 60 Hz

## SELF-CONTAINED ICE CUBE MACHINE

### FEATURES

- ▶ PRODUCES FULL DICE ICE CUBES OR HALF DICE ICE CUBES.
- ▶ STIF: STRONG INOX FRAME. SOLID MACHINE STRUCTURE IN 4 COLUMNS WITH AISI 304 STAINLESS STEEL FRAME.
- ▶ STRONGEST DOOR IN THE MARKET. MADE OF STAINLESS STEEL. OPENING AND DAMPING SYSTEM PATENTED BY ITV.
- ▶ SMART FRONT VENTILATION SYSTEM, (SFVS) ALLOWS BUILT-IN INSTALLATION OF THE UNIT.
- ▶ CLEANING SWITCH: ALLOWS CIRCULATION OF WATER WITH DESCALING PRODUCT (CALKIN OR SIMILAR) WITHOUT COOLING.
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. PUMP WITHOUT SEALS, WHICH AVOIDS DETERIORATION IN HARD WATER.
- ▶ EASI: EASY ACCESS FOR SERVICE & INSTALLATION. ALL PANELS CAN BE DISASSEMBLED SEPARATELY.
- ▶ ELECTRONIC CONTROL THAT ENHANCES THE PERFORMANCE OF THE MACHINE AND ALLOWS IT TO ADAPT TO EXTREME CLIMATES.
- ▶ NATURAL GAS R290 WITH VERY LOW GLOBAL WARMING POTENTIAL WHICH ALSO REDUCES THE ENERGY CONSUMPTION.
- ▶ LED ON/OFF SWITCH / PCB MOUNTED AT THE BOTTOM.
- ▶ TROPICALIZED MACHINES (T CLASS) / STAINLESS STEEL ADJUSTABLE LEGS.



	24 H	70°F/20°C	50°F/10°C	90°F/32°C	70°F/21°C	<b>lbs (Kg)</b>	<b>in (mm)</b>	<b>in (mm)</b>	<b>SPIKA HALF DICE</b> 0.9" (W) x 0.43" (D) x 1.02" (H) 23 mm (W) x 11 mm (D) x 26 mm (H) Average dimensions
SPIKA NG 130 H		<b>134 (61)</b>	<b>101 (47)</b>	<b>44.1 (20)</b>	Width <b>21.07"</b> (535)	Width <b>24.02"</b> (610)	<b>SPIKA FULL DICE</b> 1.02" (W) x 0.9" (D) x 1.02" (H) 26 mm (W) x 23 mm (D) x 26 mm (H) Average dimensions		
SPIKA NG 130 F		<b>134 (61)</b>	<b>101 (47)</b>		Depth <b>23.43"</b> (595)	Depth <b>25.79"</b> (655)		Height <b>31.07"</b> (789)	Height <b>35.83"</b> (910)

\* WITH LEGS 35"/37"

### ACCESSORIES

#### INCLUDED



6" HEIGHT ADJUSTABLE LEG KIT



SCOOP

#### NOT INCLUDED



10" FILTER  
ANTI-LIMESCALE + ANTI-CHLORINE  
CS-101 K




10" REPLACEMENT CARTRIDGE  
ANTI-LIMESCALE + ANTI-CHLORINE  
CS10



SCALE KLEEN

# TECHNICAL SCHEME

SPIKA NG 130

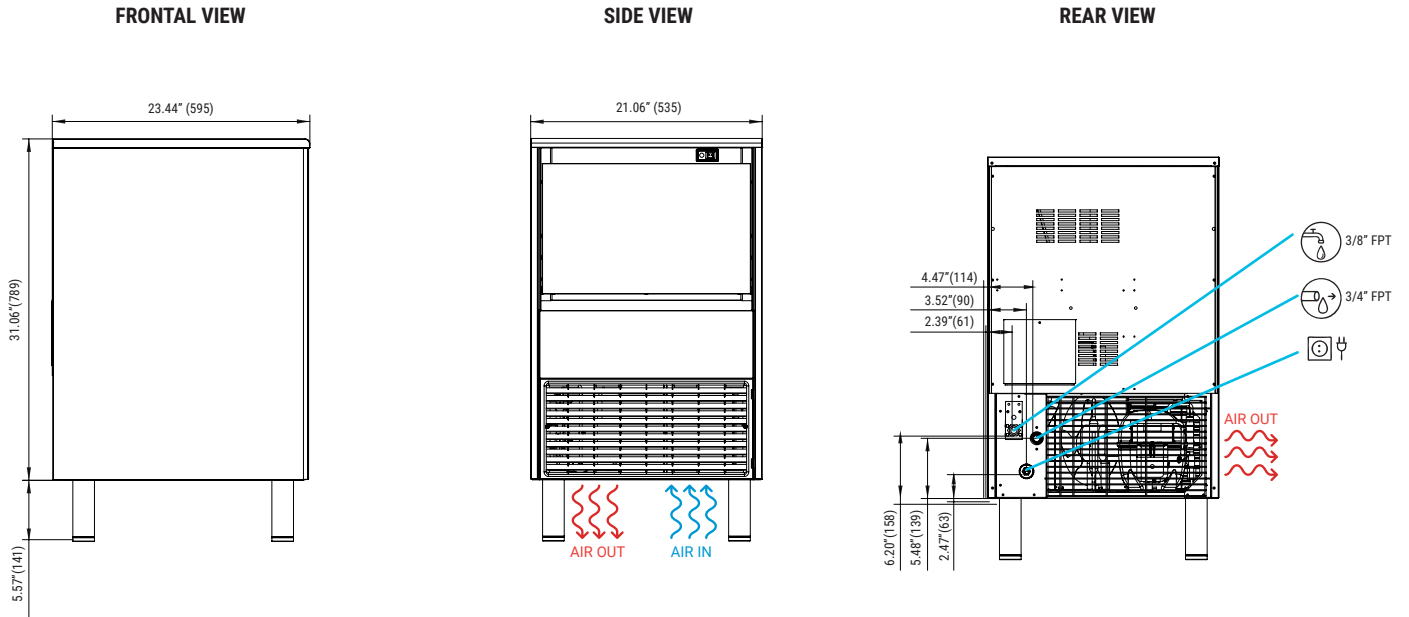

\* All dimensions in inches (and mm)

## OPERATING CONDITIONS

**PRODUCTION (LBS) 60Hz**

- ±10% V
- 41°F/109°F
- 41°F/95°F
- 14.5 psi (1 bar) /87 psi(6 bar)
- 75/150 Ice cubes/cycle



V	Hz	ph
115	60	1N

MODELS	Kwh/100 lbs	Water Usage (Gal/100 lbs)	Ice Production (70/50)	Ice Production (90/70)	External Dimensions (inches)			Voltage /Hz /ph	Amp	Heat Rejected (BTU/hr)	Net Weight (lbs)	Crated Weight (lbs)
					W	D	H					
SPIKA NG 130 H	5.85	21.59	134	101	21.07	23.43	31.07	115/60/1	5.45	1,602	106	123.5
SPIKA NG 130 F	5.85	22.23	134	101	21.07	23.43	31.07	115/60/1	5.45	1,602	106	123.5



ITV Ice Makers, Inc.  
 9550 Satellite Blvd, Suite 100  
 Orlando, FL 32837  
 Phone: 1 407 826 1860 | Fax: 1 407 826 1861  
 Toll Free: 1 888 488 1423  
 sales@itvice.com | www.itvice.com



SERVICE  
 service@itvice.com  
 Skype: service@itvice.com  
 PHONE: +1 888 488 1423  
 FROM 8AM TO 5PM EST



**2 ADDITIONAL YEARS ON COMPRESSOR & EVAPORATOR**  
 Read our warranty policy to know more about limitations and exclusions

