

**Refrigeration Equipment
Bottle Cooler with Slide Top,
13 cu.ft, 50" (R600a)**


ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

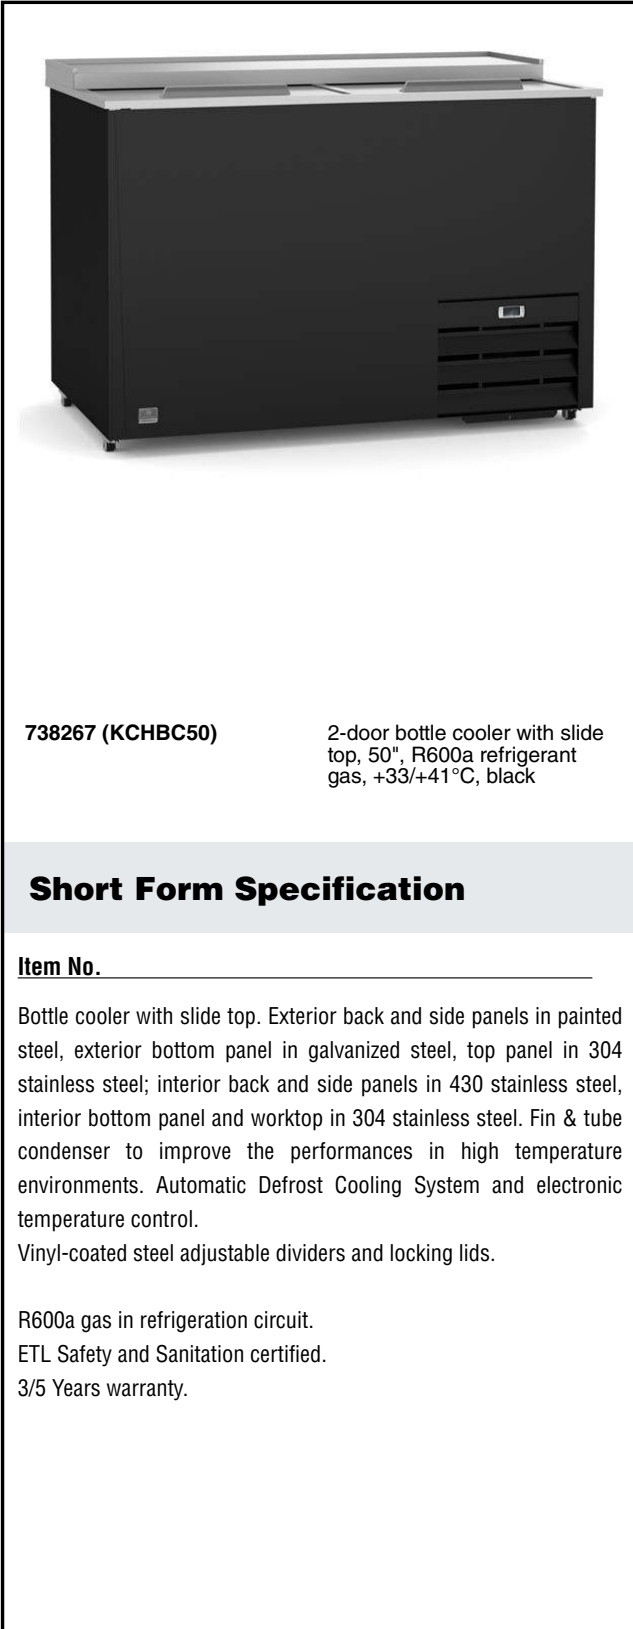

738267 (KCHBC50)

2-door bottle cooler with slide top, 50", R600a refrigerant gas, +33/+41 °C, black

Short Form Specification

Item No. _____

Bottle cooler with slide top. Exterior back and side panels in painted steel, exterior bottom panel in galvanized steel, top panel in 304 stainless steel; interior back and side panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and electronic temperature control.

Vinyl-coated steel adjustable dividers and locking lids.

R600a gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.


Main Features

- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Vinyl-Coated Steel adjustable dividers to customize bottle storage effortlessly.
- Locking doors.
- External temperature display.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmental impact.
- Locking lids.

Construction

- CFC and HCFC free (ecological refrigerant type: R600a).
- Pre-wired heavy duty power cord.
- Electronic control to select temperatures.

APPROVAL: _____

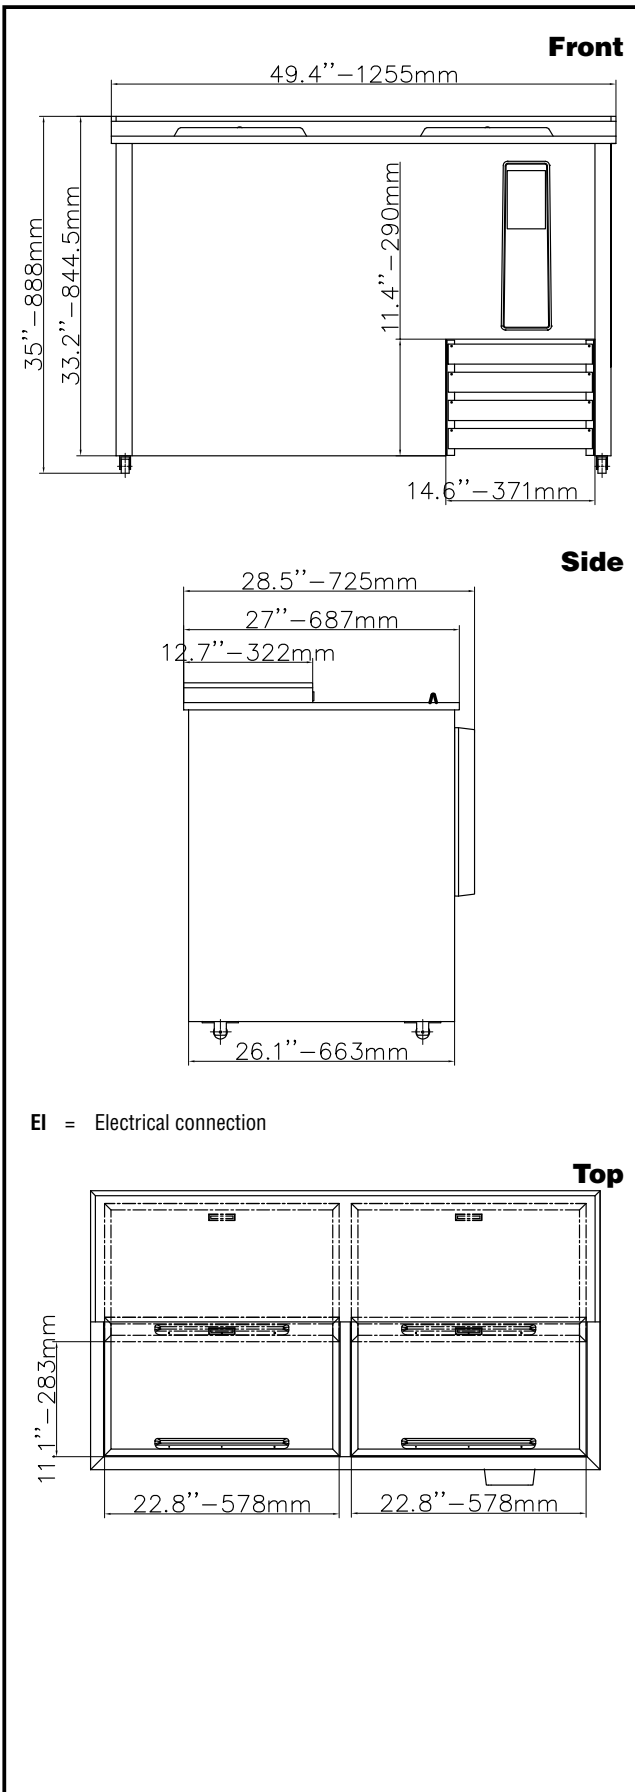

EI = Electrical connection

Electric

| | |
|------------------------|------------------|
| Supply voltage: | 115 V/1 ph/60 Hz |
| 738267 (KCHBC50) | |
| Electrical power, max: | 0.3 kW |
| Current consumption: | 3 Amps |
| Plug type: | USA NEMA 5-15P |

Capacity:

| | |
|-----------------|--------------|
| Gross capacity: | 13.7 cu.feet |
|-----------------|--------------|

Key Information:

| | |
|-------------------------------|--|
| External dimensions, Width: | 49 7/16" (1255 mm) |
| External dimensions, Depth: | 28 9/16" (725 mm) |
| External dimensions, Height: | 34 15/16" (888 mm) |
| Internal Dimensions (depth): | 26 1/16" |
| Internal Dimensions (height): | 22 15/16" |
| Internal Dimensions (width): | 45 3/8" |
| Shipping height: | 39 3/4" (1010 mm) |
| Shipping weight: | 298 lbs (135 kg) |
| Shipping volume: | 34.04 ft ³ (0.96 m ³) |
| Type of external material: | Black Prepainted Steel |
| Type of internal material: | Stainless Steel |
| Warranty: | 3 / 5 years |

Refrigeration Data

| | |
|-----------------------------|------------|
| Compressor Horsepower: | 1/6 |
| Refrigerant type: | R600a |
| Refrigerant weight: | 60 g |
| Operating temperature min.: | 32 °F |
| Operating temperature max.: | 41 °F |
| Condenser type: | Fin & tube |