




6982 S Quentin St  
Centennial, CO 80112  
Toll free: 888.733.3456  
Main 303.539.8300  
Fax: 303.539.8399  
www.koalabear.com

# DIAPER DISPENSER SURFACE MOUNTED STAINLESS STEEL FINISH

## KB143-SS

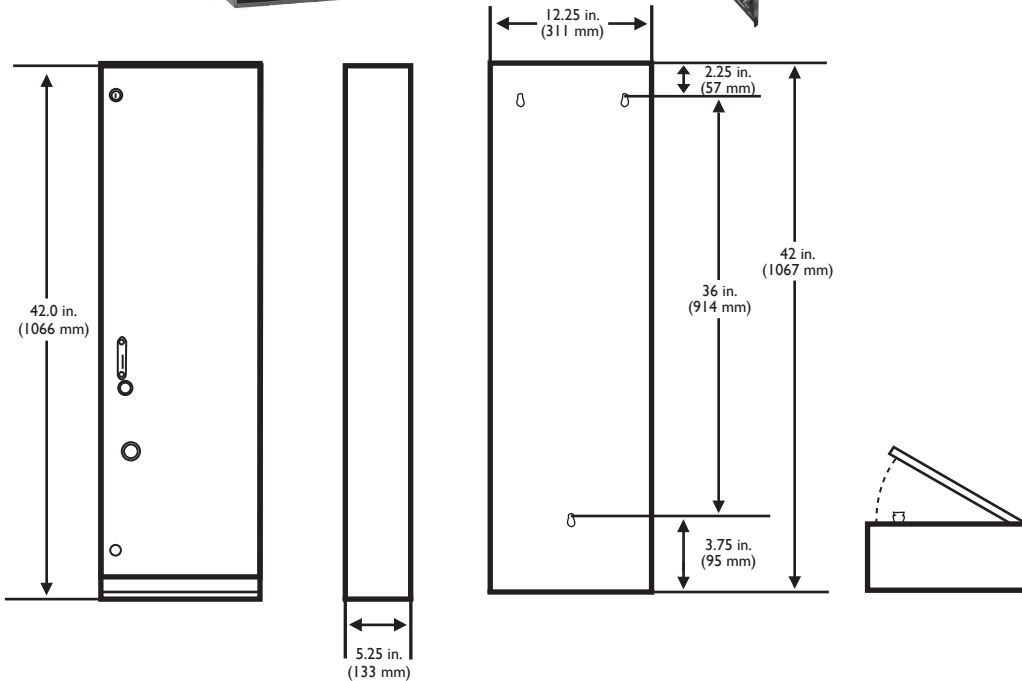

**Rough Wall Opening  
for Recessed Installation  
12.50" (318 mm) Wide  
42.25" (1,073 mm) High  
Depth Can be Variable  
(see Installation Instructions)**

Continued...

**MATERIALS:**

Type 304 brushed stainless steel finish. May be recessed and finished with optional trim kit (KB144-99).

**OPERATION:**

The shelves of the Diaper Dispenser are easily reset for loading by running the index finger up the right side of the shelves until they lock in place. The top shelf has an automatic empty device that will cause the coin mechanism to reject all coins when the vender is empty. The vender is set to vend at one dollar.

**Warning:** *To ensure that the unit supports the intended loads, dispenser unit must be properly installed according to the manufacturer's instructions.*

**INSTALLATION:**

To ensure proper installation and compliance to building codes, it is recommended that a qualified person or carpenter perform the installation of the unit. The vender can be mounted on a vertical surface without removing any part of the unit. Any standard fastener not larger than 3/8" (76 mm) diameter such as wood screws, expansion bolts, machine or carriage bolts can be used depending on the type of wall. The wall section selected for installation should be sturdy. The top two fasteners should be loosely installed in the wall with the heads of the fasteners projecting approximately 1/4" (6 mm). Raise the top shelf of the magazine into its vend position to expose one of the two top mounting holes in the back of the cabinet. The keyhole shape of the mounting holes will permit you to hang the cabinet on the two fasteners. While in this unsecured position, mark the bottom two mounting holes on the wall and remove the cabinet. Install the bottom two fasteners and secure the cabinet to the wall using washers under the heads of all fasteners.

**RECESSED INSTALLATION:**

When installing the Diaper Dispenser in a recessed configuration, you will need the optional (sold separately) trim kit (KB144-99). Cut a rough opening of 42 1/4 in (1073 mm) x 12 1/2 in (318 mm) in the wall where unit will be installed. Slip flange over the rear of the dispenser cabinet and determine where on the vendor the flange should be attached. This position depends on how deep the vendor can be recessed into the wall and how far out you want the front of the dispenser to be from the surface of the wall. Once the position of the flange on the cabinet has been determined, use flange holes as drill guides and drill holes in cabinet using a 7/64" (178 mm) drill bit. (Do not use an 1/8" 25 mm) drill bit as it will be too large for mounting screws). Secure flange to cabinet using #6 x 1/4" (6 mm) self tapping screws (provided). Depending on the type of wall the unit is installed on, you may need additional hardware (not provided). It may also be necessary to frame out the rough wall opening to allow for the unit to be securely installed into the wall.

**SPECIFICATION:**

Diaper Dispenser shall be durable type 304 brushed stainless steel. Unit shall have a 24-diaper pack capacity. Unit shall be backed by manufacturer's 5-year limited warranty on materials and workmanship. Unit shall be manufactured in the U.S.A.

*The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet.*

*The manufacturer reserves the right to, and does from time to time, make changes and improvements in designs and dimensions without notice.*



Koala Kare Products  
A Division of Bobrick

6982 S. Quentin Street  
Centennial, CO 80112-3945

Main: 303.539.8300  
Fax: 303.539.8399

Toll Free: 888.733.3456  
[www.koalabear.com](http://www.koalabear.com)