



**FEATURES**

- Oil lubricated rotary vane vacuum pump, nominal speed 282 cf/h (8 m<sup>3</sup>/h);
- Vacuum level control through high precision absolute-type vacuum sensor, which does not require calibration;
- Maximum vacuum 99,8% (2 millibar);
- 12,2" sealing bar, easily removable for cleaning;
- Brilliant stainless steel vacuum chamber with constant thickness, easy to clean being free of edges and receptacles;
- Waterproof control panel, resistant to liquids, humidity, dirt and dust;
- 10 editable user programs;
- 1 cycle for vacuum containers;
- "H2Out" pump oil dehumidification cycle,
- Resettable oil change alarm;
- Menu accessible to technical assistance for parameter adjustment and reading of cycles carried out;
- High-thickness blued PMMA (Plexiglass) lid with polished and rounded edges; opens automatically at the end of the cycle;
- Lowering system of the lid at the end of the work in the rest position by releasing the rear gas spring, which allows to release the tension on the gas spring and on the lid;
- Access for easy maintenance through front opening of the casing;
- Standard "Easy" accessory for external vacuum in embossed bags;
- 2 PE-filling plates for product adjustment and cycle speed up.

**DESCRIPTION**

The base model "30" of the Idea line catches the eye for cutting-edge design. Made entirely of AISI304 stainless steel, with digital control panel and standard absolute vacuum sensor, it is characterized by ease of use and compactness. Its versatility makes it possible to pack the products in the chamber, in external containers via the suction device and in embossed envelopes outside the chamber. Easy maintenance and cleaning make it a precise, fast, versatile and reliable work tool.



**SEALING BAR 12.2 inch**  
**VACUUM PUMP 282 cf/h**  
**ABSOLUTE SENSOR**  
**CONTROL**

**ACCESSORIES (NOT INCLUDED)**


- Bags for storage, cooking and "cook & chill"; embossed bags;
- Stainless steel cart with castors and shelf;
- Inclined stainless steel plate for liquid packing;
- Stainless steel vacuum containers; suction device.



PROJECT	DATE	APPROVED
ITEM	QTY	

VACUUM PACKAGING MACHINES IDEA 30

UPDATED:  
01/03/2022

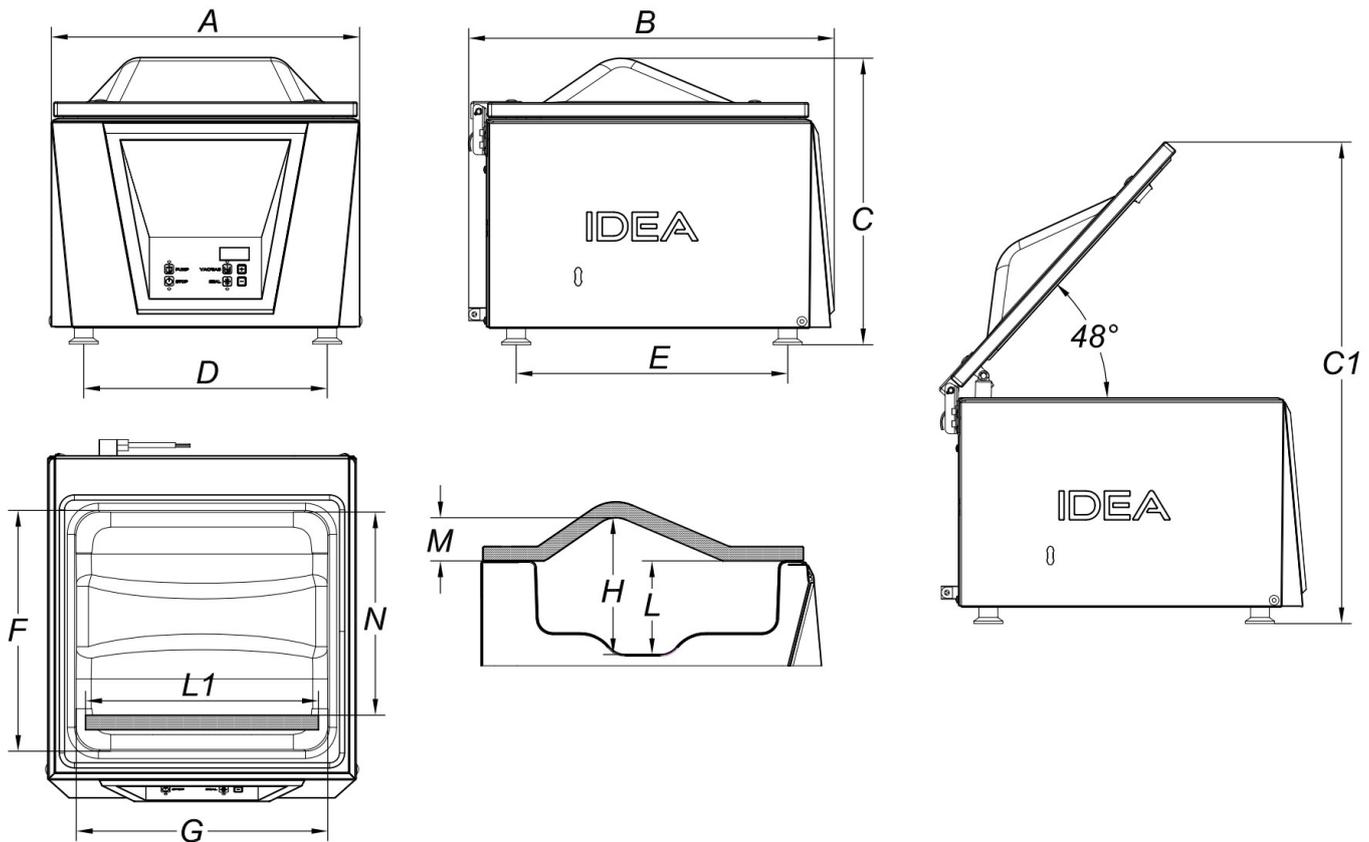

## SPECIFICATIONS

Length of seal L1	inch	12,2
Nominal pump speed	cf/h	282
Final pressure	mbar	2
Chamber size (FxGxH)	inch	13,1x13,8x7,5
Useful chamber space (N)	inch	11,1
Chamber depth (L)	inch	5,1
Chamber volume	Usgal	3,7
Power	W	600
Electrical voltage/Frequency/Phases	V/Hz	110V / 60Hz / 1Ph+N+PE
Power cord and plug		78,7 inch+IEC / Nema 5
Current	A	5,45
Housing materials		Stainless steel (AISI304)
Vacuum chamber material		Hydroformed stainless steel (AISI304)
Lid material		PMMA (plexiglas)
Overall dimensions (AxBxC)	inch	16,7x19,8x15,7
Maximum height with open lid (C1)	inch	26,3
Distance between supports (DxE)	inch	13,2x14,8
Weight (with shelves)	lbs	77,8
Noise level	dB(A)	58
Environmental operating temperature (min-max)	°F	53,6-104