
sammic

IMMERSION BLENDER XM-12 120/50-60/1

Compact immersion blender. 0.33 Hp.

P/N. 3030740



- Designed to work with maximum comfort in recipients of up to 10 litres of capacity.
- ✓ In option: shorter MA-11 mixarm.

Maximum comfort for the user

- √ Compact design: logical and manageable size.
- Ergo-design & bi-mat-grip: The external casing, in two materials, allows an ergonomic hold with an anti-slip grip and the handle features optimum inclination to minimise fatigue.
- ✓ Click-on-arm: detachable arm with quick and safe locking.
- √ Hood designed to avoid splashes during work.
- ✓ Intuitive use: very simple operation. Includes warning light when the machine is connected to the mains.

Designed to last

- Professional performance: it is capable of carrying out prolonged work without overheating.
- √ Life-plus: equipped with a motor which has passed all of the most demanding usage tests.
- √ Studied geometry: casing designed to avoid rolling and falling.
- Easy to clean: the arm can be washed under the tap or in the dishwasher.
- ✓ Approved by NSF: guaranteed safety and hygiene.

INCLUDES

✓ Variable speed motor block.
✓ MA-12 mixer arm.

ACCESSORIES

■ Mixer arms MA-10







SALES DESCRIPTION

The most delicate preparations, airy blendings, smooth purees with ho need of add-on tools.

Designed for continuous use.

Ideal for mise en place.

Maximum comfort of use in recipients of up to 10.6qt.

All-in-one

- √ Versatility without add-on tools.
- √ Tri-blade, professional, made of tempered steel and equipped with a long lasting cutting edge.
- √ Vario-speed: adjustable speed.











usa@sammic.com 1225 Hartrey Avenue 60202-1056 Evanston, IL phone +1 (224) 307-2232 toll free +1 844 275 3848



Project	Date
Item	Qty

DYNAMIC PREPARATION

COMMERCIAL HAND BLENDERS - XM RANC

sammic

IMMERSION BLENDER XM-12 120/50-60/1

Compact immersion blender. 0.33 Hp.

SPECIFICATIONS

Total loading: 0.33 Hp

Maximum recipient capacity: 10.6 qt. Motor speed: 1500 - 15000 rpm

Blade diameter: 1.75 " Blade guard diameter: 2.56 "

Electrical supply: 120 V / 50-60 Hz / 1 $\scriptstyle\sim$

(1.5 A)

Length


Liquidising arm length: 8.8 " Total length: 17.6 "


Net weight: 3.1 lbs.

Noise level (1m.): <80 dB(A)

Crated dimensions

19.5 x 3.1 x 7.1 " Gross weight: 4.0 lbs.

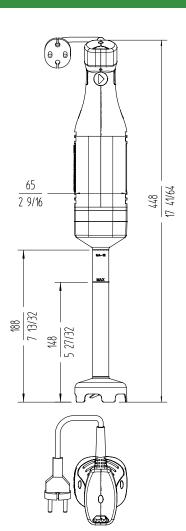

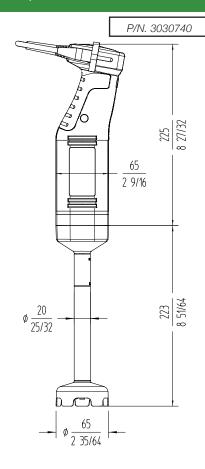



usa@sammic.com 1225 Hartrey Avenue 60202-1056 Evanston, IL phone +1 (224) 307-2232 toll free +1 844 275 3848



Project	Date
Item	Qty

Approved