



KUCR-72-3

TRIPLE DOOR UNDERCOUNTER REFRIGERATOR

All-stainless steel construction, heavy-duty refrigeration system that delivers reliable and efficient cold storage with superior quality.



KEY FEATURES



• Eco-Friendly Refrigerant
Environmentally friendly R290 hydrocarbon refrigerant has low Global Warming Potential (GWP). Meets all USA, California & Canada refrigerant & energy standards.



• Digital Control
Digital temperature controls and display with automatic defrost system.



• High Power Reliable Refrigeration System
Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining cooler temperatures for food preservation.



• Durable, Self-contained System
Stainless steel exterior and interior, coated evaporator coil and oversized bottom mount compressor



Signature 40/80 Warranty
40 months parts and labor
80 months on compressor (part only)



3560 NW 56th Street
Fort Lauderdale, FL, United States 33309
Telephone: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100


5659 Royalmount Ave.
Montreal, QC, Canada H4P 2P9
Telephone: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com / mvpgroupcorp.com



KUCR-72-3

TRIPLE DOOR UNDERCOUNTER REFRIGERATOR

PRODUCT VIEWS

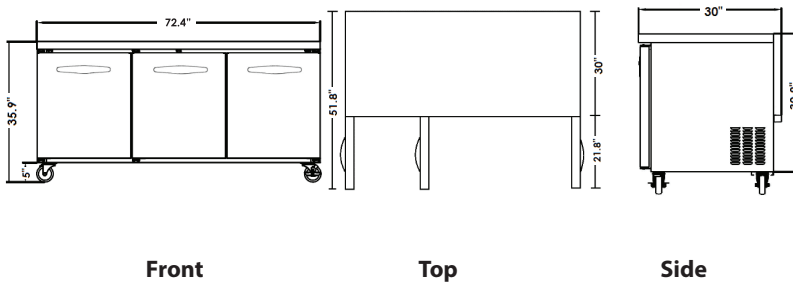

Front

Top

Side

ADDITIONAL FEATURES



Heavy-duty 5" castors (2 with brakes)



Self-closing doors



Foamed-in-place high-density CFC-free polyurethane insulation



Tight-sealing magnetic vinyl gaskets

TECHNICAL SPECIFICATIONS

Exterior Dimensions		Interior Dimensions	
W:	72.4" (1839 mm)	W:	67.5" (1715 mm)
D:	30" (762 mm)	D:	20.1" (511 mm)
H:	35.9" (912 mm)	H:	26.5" (673 mm)

Interior Capacity

20.2 Cu Ft
473 L

Doors	Material	Shelves
3	Stainless Steel	6
Exterior Material		Stainless Steel
Interior Material		Stainless Steel

REFRIGERATION PERFORMANCE

Refrigerant

R290

Compressor Power

1/4 HP

Thermostat default setting

33°F (0.5°C) to 40°F (4°C)

ELECTRICAL

Power Supply

115V/60Hz

Amps

5.2A

Plug Type

NEMA 5-15P

LOGISTICS

Unit Weight	Shipping Dimensions	
263 lb (119 kg)	W:	73.8" (1875 mm)
Shipping Weight	D:	34.1" (866 mm)
	H:	36.6" (930 mm)